

24" OVERLAY READY REFRIGERATOR DRAWERS

TUR-24-D-OP-C

FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior.*
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- Balanced, forced-air refrigeration system enables rapid product pull down and even temperature throughout.
- Exclusive True®-Glide soft-close feature for both drawers.
- Rated for both beverage and open food storage.
- NSF/ANSI Standard 7 compliant for packaged food product.
- Sabbath mode compliant.
- All undercounter models UL rated for outdoor use.


ORGANIZATION

- 2 heavy-duty adjustable bin dividers per drawer.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com.

CUSTOMIZATION

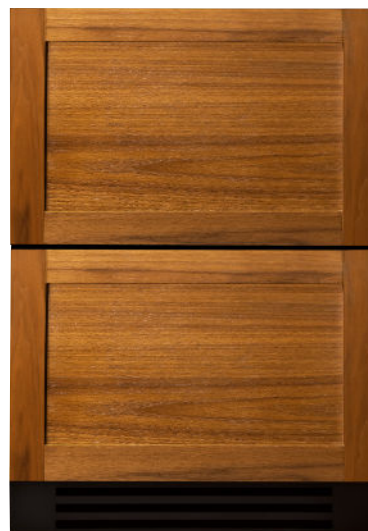

SPECIFICATIONS

Dimensions* (w x h x d) 23 7/8" x 34 1/4" x 23 7/8"

Cutout Dimensions (w x h x d) 24" x 34 1/2" x 24"

Standard Overlay Panel (w x h x d) 23 5/8" x 14 11/16" x 3/4"

Panel provided by others. Other installation options available.
Consult install guide for details.

Capacity (cu. ft.) 5.4  x 207

Temperature Range 33°F - 47°F

Weight (lbs.) 210

Voltage 115/60/1  115/60/1 NEMA-5-15R

Amps 1.9

Annual Energy Consumption (kwh) 277

Power Cord Length (ft.) 8


Energy Star Rated Yes

*NOTE: Overlay models have black powder coated steel exteriors.


*Dimensions may vary +/- 1/8"

24" OVERLAY READY REFRIGERATOR DRAWERS

TUR-24-D-OP-C — (shown with a $\frac{3}{4}$ " cabinetry panel)

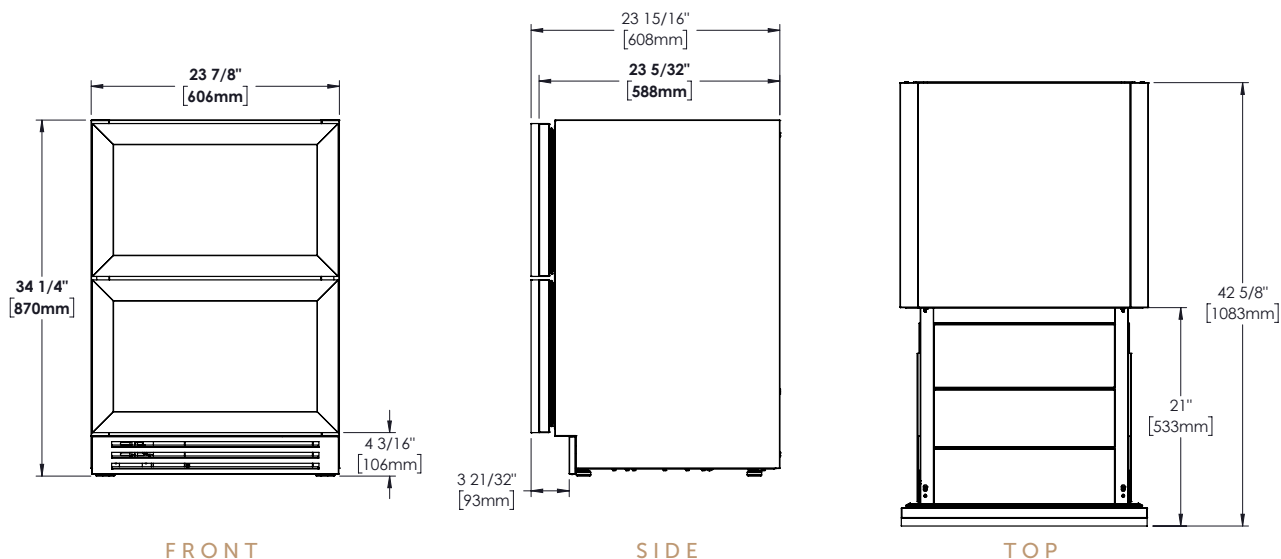

OPENING DIMENSIONS

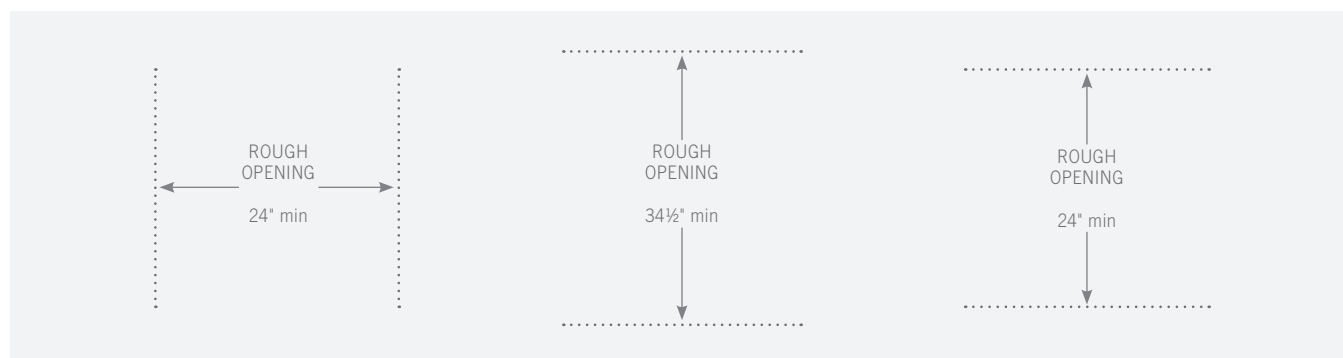

MODEL OPTIONS

MODEL	FINISH
TUR-24-D-OP-C	Overlay Panel Refrigerator Drawer

ACCESSORIES (OPTIONAL)

Anti-condensation pads

Drawer pan kit

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)

