DD36 QUICK REFERENCE GUIDE-WITH FLUSH INSTALLED COOKTOP

DD36

FEATURES

- Breathe cleaner air and enjoy less greasy residue in your kitchen
- "Disappears" when not in use for a sleek, minimal look and use in open-concept kitchens
- Lowers when not in use, and rises 14 inches to whisk away smoke and odors
- Enjoy remote control operation within nine feet of unit
- Matches the heavy-gauge stainless steel look of Sub-Zero, Wolf, and Cove
- Select from internal, in-line, or remote blower options (blower required)
- Automatically turns off the blower with a five-minute "delay-off" feature
- Minimizes the backward flow of cold air with backdraft transition
- Install a reversible motor box on either side of the downdraft for design flexibility

ACCESSORIES

- 10" Round Inline Damper
- 8" Round Inline Damper
- Contemporary Cooktop/Downdraft Trim
- Make-Up Air Damper
- Recirculating Filter
- Recirculating Kit
- SRT Downdraft Trim
- Inline Blowers
- Internal Blowers
- Remote Blowers

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



BLOWER OPTIONS

- 600 CFM Internal
- 600 CFM Inline
- 600 CFM Remote


Specifications are subject to change without notice. This information was generated on January 30, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.

DD36 QUICK REFERENCE GUIDE-WITH FLUSH INSTALLED COOKTOP

PRODUCT SPECIFICATIONS


Model	DD36
Dimensions	36"W x 14"H x 2"D
Weight	80 lbs
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	6" round internal or 10" round inline or remote
Receptacle	3-prong grounding-type

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

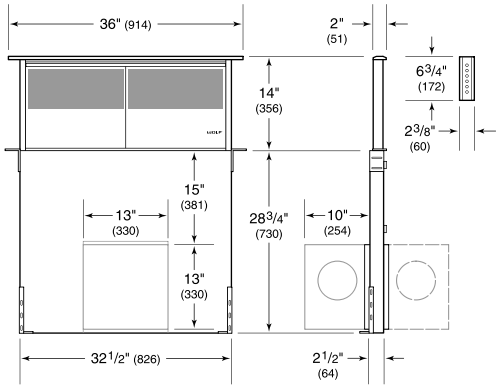

NOTE: Shown with front mounted internal blower with 6" (152) round discharge, dashed line represents rear mount.

FLUSH INSTALLATION

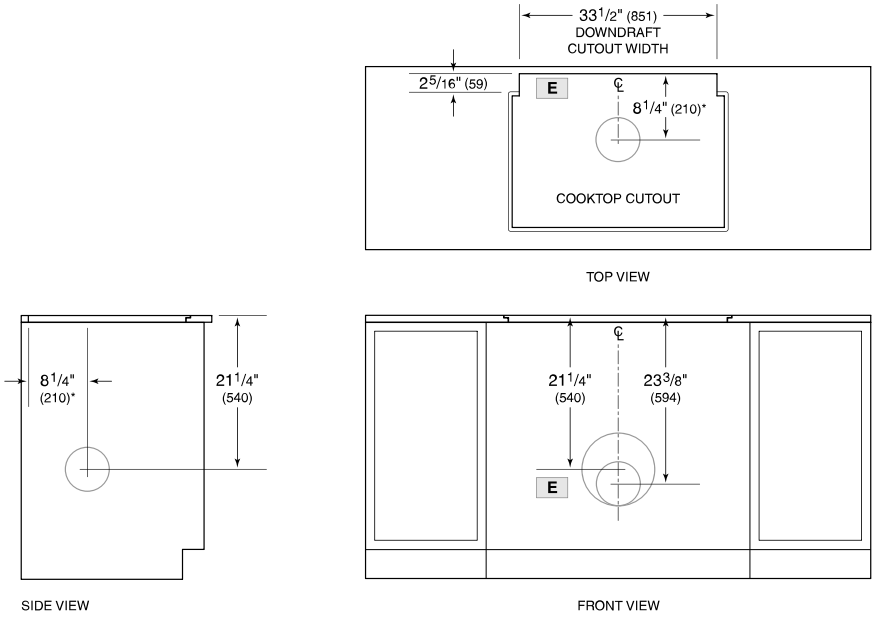

**6" (152) back from countertop cutout when internal blower is rear mounted.*

NOTE: Internal blower 6" (152) round, side, rear, or bottom discharge. In-line and remote blower 10" (254) round, rear discharge. Centerline indicates center of downdraft cutout.

Specifications are subject to change without notice. This information was generated on January 30, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.