



QUIET COOL™ BUILT-IN REFRIGERATION

Customize Your Climate



Viking Professional built-in refrigeration offers cold storage options in a range of configurations that fit perfectly to your functional and styling desires. These professional quality refrigerator/freezers provide the ultimate in cold storage, with dedicated drawers and shelves to accommodate every item on your grocery list. Have your Viking Professional refrigerator blend seamlessly into cabinetry with custom panel options, or further adorn your refrigerator by choosing from one of our 12 exclusive finishes.



36"W. Bottom-Freezer



42"W. Side-by-Side



42"W. Side-by-Side
with Dispenser



48"W. Side-by-Side



48"W. Side-by-Side
with Dispenser

Custom Panel models available



QUIET COOL™ BUILT-IN REFRIGERATION FEATURES



ProChill™ Temperature Management System

- Variable Speed DC Overdrive™ Compressor quickly chills food and saves energy
- Single compressor system is one of the quietest, most technologically advanced compressors available
- Electronic controls maintain even temperatures within one degree to keep food fresher longer
- Odor Eliminator™ Evaporator removes odors and excess humidity
- Maintenance-free Super Clog Resistant™ Condenser prevents dust and other airborne particles from clogging the condenser




Filter-Free Freshness

- **EXCLUSIVE**  **Plasmacluster*** Ion Air Purifier uses advanced ion technology to eliminate airborne bacteria, mold, and odors to enhance food preservation
- Functions at 100% capacity and never degrades and never needs replacing



Adjustable Cold Zone™ Drawer

- Adjustable temperature and humidity controls keep food fresher longer
- Intuitive icon based controls display the optimal setting for your food type
- Extra-large capacity accommodates full deli tray
- Allows storage of foods 3-5 degrees colder than main compartment
- Prolongs the life of fresh meats 3-5 days longer without freezing
- Can also be used as a quick chill area

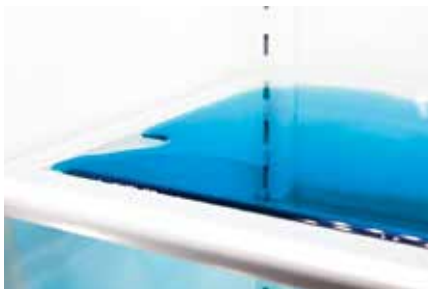

The Latest in Spill Control Technology

- New Spillproof Plus™ Shelves with Nano technology create an invisible barrier to contain spills
- Seamless glass shelves make cleanup easy and maximize usable space
- 3/8" thick tempered glass shelves provide industry-leading durability



LED Lighting

- All items are in clear view with bright energy efficient LED lighting from top and sidewalls



The Industry's Best and Most Comprehensive Warranty

- **3-year** full covers complete unit
- **6-year** full – sealed refrigeration system
- **12-year** limited – sealed refrigeration system
- **90-day** full – cosmetic parts such as glass, painted items, and decorative items

*Plasmacluster™ is a trademark of Sharp Corporation

SPECIFICATIONS

36" Bottom-Freezer						
Description	VCBB5362		VCBB5362/Flush Mount		FDBB5362*	
Overall width	36" (91.5 cm)					
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.					
Overall depth from rear	22-3/16" (56.4 cm)		23-3/8" (59.4 cm)		23-13/16" (60.5 cm)	
To front edge of side trim:	24" (61.0 cm)		24" (61.0 cm)		24-3/4" (62.9 cm)	
To front of top grille:	N/A		N/A		24" (61.0 cm)	
To front edge of door trim:	26-1/2" (67.3 cm)		26-1/2" (67.3 cm)		N/A	
To front of handle endcap:	35-5/8" (90.5 cm) min. to 35-3/4" (90.8 cm) max.		36" (91.5 cm)			
Cutout width	35-5/8" (90.5 cm) min. to 35-3/4" (90.8 cm) max.		36" (91.5 cm)			
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.					
Cutout depth	24" (61.0 cm) min.*					
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product					
Maximum amp usage	9.9 amps					
Maximum panel weight	N/A	N/A	N/A	N/A	Fresh food 45 lbs. (20.4 kg)	Freezer 20 lbs. (9.0 kg)
Inlet water requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi					
Overall interior dimensions						
Refrigerator	15.3 cu. ft. (434 liters)					
Freezer	5.1 cu. ft. (145 liters)					
Total capacity	20.4 cu. ft. (578 liters)					
Approx. shipping weight	565 lbs. (254.3 kg)				500 lbs. (227.3 kg)	

42" Side-By-Side						
Description	VCSB5422	VCSB5422D	VCSB5422/ Flush Mount	VCSB5422D/ Flush Mount	FDSB5422*	FDSB5422D*
Overall width	42" (106.7 cm)					
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.					
Overall depth from rear						
To front edge of side trim:	22-3/16" (56.4 cm)		23-3/8" (59.4 cm)		23-13/16" (60.5 cm)	
To front of top grille:	24" (61.0 cm)		24" (61.0 cm)		24-3/4" (62.9 cm)	
To front edge of door trim:	N/A		N/A		24" (61.0 cm)	
To front of handle endcap:	26-1/2" (67.3 cm)		26-1/2" (67.3 cm)		N/A	
Cutout width	41-5/8" (105.7 cm) min. to 41-3/4" (106 cm) max.		42" (106.7 cm)			
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.					
Cutout depth	24" (61.0 cm) min.*					
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product					
Maximum amp usage	9.9 amps					
Maximum panel weight	N/A	N/A	N/A	N/A	Fresh food 40 lbs. (18.1 kg)	Freezer 35 lbs. (15.9 kg)
Approx. shipping weight	652 lbs. (293.4 kg)	676 lbs. (304.2 kg)	652 lbs. (293.4 kg)	676 lbs. (304.2 kg)	525 lbs. (236.2 kg)	605 lbs. (272.3kg)

All Models	Non-Dispenser Model	Dispenser Model
Inlet water requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi	1/4" copper tubing inlet waterline; minimum 35 psi; maximum 120 psi
Overall interior dimensions	15.0 cu. ft. (425 liters)	15.0 cu. ft. (425 liters)
Refrigerator	9.0 cu. ft. (255 liters)	8.9 cu. ft. (252 liters)
Freezer	24.0 cu. ft. (680 liters)	23.9 cu. ft. (677 liters)
Total capacity		

***Note:** Custom panel models fit flush in 25" (63.5 cm) deep cabinet openings. They can be installed in standard 24" (61.0 cm) deep openings. The door faces and top grille will protrude 3/4" (1.9 cm) into the room.

SPECIFICATIONS CONTINUED

48" Side-By-Side						
Description	VCSB5482	VCSB5482D	VCSB5482/ Flush Mount	VCSB5482D/ Flush Mount	FDSB5482*	FDSB5482D*
Overall width	48" (121.9 cm)					
Overall height (from bottom)	82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max.					
Overall depth from rear	22-3/16" (56.4 cm)		23-3/8" (59.4 cm)		23-13/16" (60.5 cm)	
To front edge of side trim:	24" (61.0 cm)		24" (61.0 cm)		24-3/4" (62.9 cm)	
To front of top grille:	N/A		N/A		24" (61.0 cm)	
To front edge of door trim:	26-1/2" (67.3 cm)		26-1/2" (67.3 cm)		N/A	
To front of handle endcap:						
Cutout width	47-5/8" (121.0 cm) min. to 47-3/4" (121.3 cm) max.		48" (121.9 cm)			
Cutout height	82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max.					
Cutout depth	24" (61.0 cm) min.*					
Electrical requirements	115 volt, 60 Hz, 15 amp dedicated circuit; 3-wire cord with grounded 3-prong plug attached to product					
Maximum amp usage	9.9 amps					
Maximum panel weight	N/A	N/A	N/A	N/A	Fresh food 50 lbs. (22.7 kg)	Freezer 35 lbs. (15.9 kg)
Approx. shipping weight	715 lbs. (321.8 kg)	735 lbs. (330.8 kg)	715 lbs. (321.8 kg)	735 lbs. (330.8 kg)	650 lbs. (292.5 kg)	675 lbs. (303.8 kg)

All Models	Non-Dispenser Model	Dispenser Model
Inlet water requirements	1/4" copper tubing inlet waterline; minimum 20 psi; maximum 120 psi	1/4" copper tubing inlet waterline; minimum 35 psi; maximum 120 psi
Overall interior dimensions		
Refrigerator	18.5 cu. ft. (524 liters)	18.5 cu. ft. (524 liters)
Freezer	9.0 cu. ft. (255 liters)	8.9 cu. ft. (252 liters)
Total capacity	27.5 cu. ft. (779 liters)	27.4 cu. ft. (776 liters)

***Note:** Custom panel models fit flush in 25" (63.5 cm) deep cabinet openings. They can be installed in standard 24" (61.0 cm) deep openings. The door faces and top grille will protrude 3/4" (1.9 cm) into the room.



Available in Seven Exclusive Color Finishes

Stainless Steel (SS), Black (BK), White (WH), Apple Red (AR), Burgundy (BU), Cobalt Blue (CB), Graphite Gray (GG)



For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com

