



#### RF 411 701

Fully integrated  
with integrated ice maker  
Width 18"

#### RF 461 701

Fully integrated  
with integrated ice maker  
Width 24"

#### RF 471 701

Fully integrated  
with integrated ice maker  
Width 30"

#### Included accessory

1 ice scoop

#### Required installation accessories

##### RA 460 010

Heating kit if columns are not attached  
(in separate niches) and less than  
6" apart.

#### Installation accessories

##### RA 421 110

Stainless steel door panel with handle  
for RF 411  
Panel thickness 3/4".

##### RA 421 610

Stainless steel door panel with handle  
for RF 461  
Panel thickness 3/4".

##### RA 421 710

Stainless steel door panel with handle  
for RF 471  
Panel thickness 3/4".

##### RA 460 000

Installation kit for side-by-side instal-  
lation (for connecting any two col-  
umns) Side-by-side kit comes already  
attached to all RF freezers and RW  
wine units.

##### RA 460 020

Connecting element for vertically split  
appliance fronts (for a flush front).

##### RA 461 110

Ventilation grill  
Stainless steel for RF 411,  
right-hinged.

##### RA 461 111

Ventilation grill  
Stainless steel for RF 411,  
left-hinged.

##### RA 461 610

Ventilation grill  
Stainless steel for RF 461,  
right-hinged.

##### RA 461 611

Ventilation grill  
Stainless steel for RF 461,  
left-hinged.

#### 400 series freezer column

##### RF 411/RF 461/RF 471

- Stainless steel interior
- Net volume (18") 8.5 cu.ft.,  
(24") 12.2 cu.ft., (30") 15.9 cu.ft.
- Integrated automatic ice maker with  
fixed water connection
- Solid aluminum door bins
- ENERGY STAR® certified
- Star-K certified

#### Operation

Electronic precision temperature  
control with digital temperature  
display.

#### Technical features

Dynamic cool air distribution with  
Multi-Flow Air System.  
Automatic defrosting with defrost  
water evaporation.  
Energy-saving vacation mode.  
Open-door and malfunction  
warning system.

#### Freezer compartment

No-frost technology with fast freezing.  
Temperature adjustable from 7°F to  
-9°F (-14°C to -25°C).  
4 solid metal shelves, three of which  
are manually adjustable.  
2 fully extendable drawers with  
transparent front, one of which is  
large, one is regular.  
Bright interior lighting with LED  
sidewall pillars.  
4 height-adjustable door bins, one of  
which is a gallon door bin.  
1 door bin with transparent front flap.

#### Ice dispenser

Integrated, with fixed water  
connection.  
Ice maker can be switched  
off independently.  
Ice cube production approx. 3.9 lbs.  
(1.8 kg)/24 h.  
Removable ice storage bin with  
approx. 8.8 lbs. (4 kg) capacity.

#### Planning notes

Flat hinge.  
Door hinge left, reversible.  
Door opening angle of 115°, optional  
90° door stop.  
Max. door panel weight 37 lbs. (18"),  
50 lbs. (24"), 64 lbs. (30").  
Requires custom toe-kick.  
Shut-off valve for water connection  
must be planned next to the  
appliance and always be accessible.  
If the water pressure exceeds 116 psi,  
connect pressure relief valve between  
water tap and hose set.  
Cold water connection required.  
Electrical location 6" above ground in  
lower left corner of unit.  
Water pressure 29 to 116 psi.

For details, please refer to the  
refrigeration planning guide on pages  
195–211.

#### Consumption data

Energy consumption 1.213/1.293/  
1.545 kWh/24 h.; annually:  
443/472/564 kWh.  
Noise level 39 dBA.

#### RA 425 110

Long stainless steel handle, length  
44 1/2", with three brackets, drilling  
distance between each mount 21 3/16".

#### RA 461 710


Ventilation grill  
Stainless steel for RF 471,  
right-hinged.

#### RA 461 711

Ventilation grill  
Stainless steel for RF 471,  
left-hinged.

#### Rating

Total rating 0.367/0.444/0.565 kW.  
Total Amps: 15 A.  
120 V / 60 Hz  
Connecting cable 78 3/4" with plug.  
Supply hose 118" with 3/4" connection.

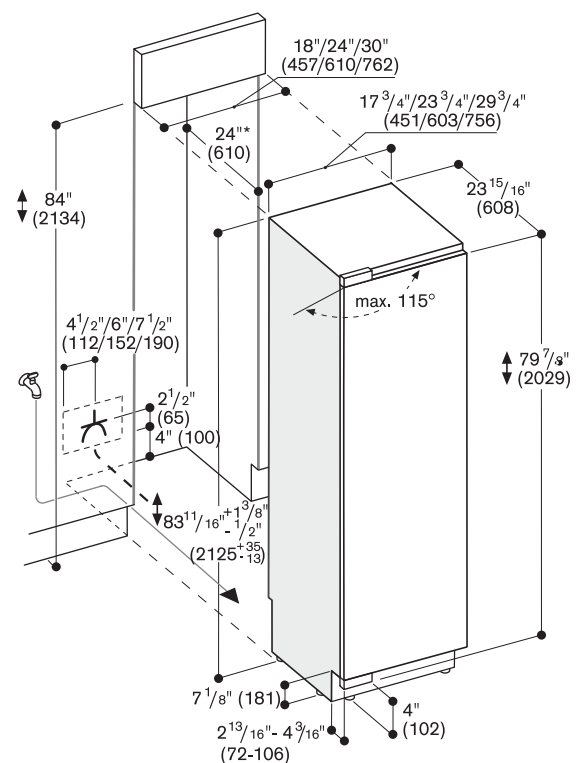

The door face dimensions are designed for a maximum gap of 1/8" (3 mm).

\* For a flush-mounted appearance, the minimum cut-out depth must be 25". See  
more details on pages 198 and 205.

Numbers indicated  
inside parenthesis ( ) = mm