DD36 QUICK REFERENCE GUIDE-WITH STANDARD INSTALLED COOKTOP

DD36

FEATURES

- Breathe cleaner air and enjoy less greasy residue in your kitchen
- "Disappears" when not in use for a sleek, minimal look and use in open-concept kitchens
- Lowers when not in use, and rises 14 inches to whisk away smoke and odors
- Enjoy remote control operation within nine feet of unit
- Matches the heavy-gauge stainless steel look of Sub-Zero, Wolf, and Cove
- Select from internal, in-line, or remote blower options (blower required)
- Automatically turns off the blower with a five-minute "delay-off" feature
- Minimizes the backward flow of cold air with backdraft transition
- Install a reversible motor box on either side of the downdraft for design flexibility

ACCESSORIES

- 10" Round Inline Damper
- 8" Round Inline Damper
- Contemporary Cooktop/Downdraft Trim
- Make-Up Air Damper
- Recirculating Filter
- Recirculating Kit
- SRT Downdraft Trim
- Inline Blowers
- Internal Blowers
- Remote Blowers

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



BLOWER OPTIONS

- 600 CFM Internal
- 600 CFM Inline
- 600 CFM Remote


Specifications are subject to change without notice. This information was generated on January 30, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.

DD36 QUICK REFERENCE GUIDE-WITH STANDARD INSTALLED COOKTOP

PRODUCT SPECIFICATIONS


Model	DD36
Dimensions	36"W x 14"H x 2"D
Weight	80 lbs
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	6" round internal or 10" round inline or remote
Receptacle	3-prong grounding-type

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

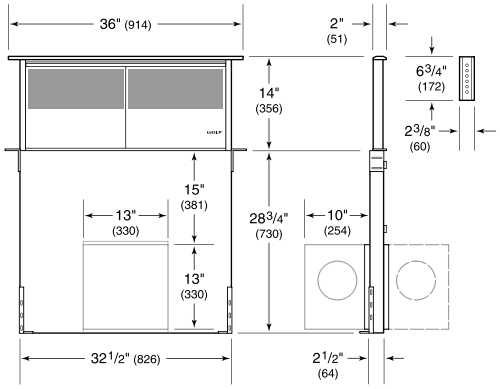

NOTE: Shown with front mounted internal blower with 6" (152) round discharge, dashed line represents rear mount.

STANDARD INSTALLATION

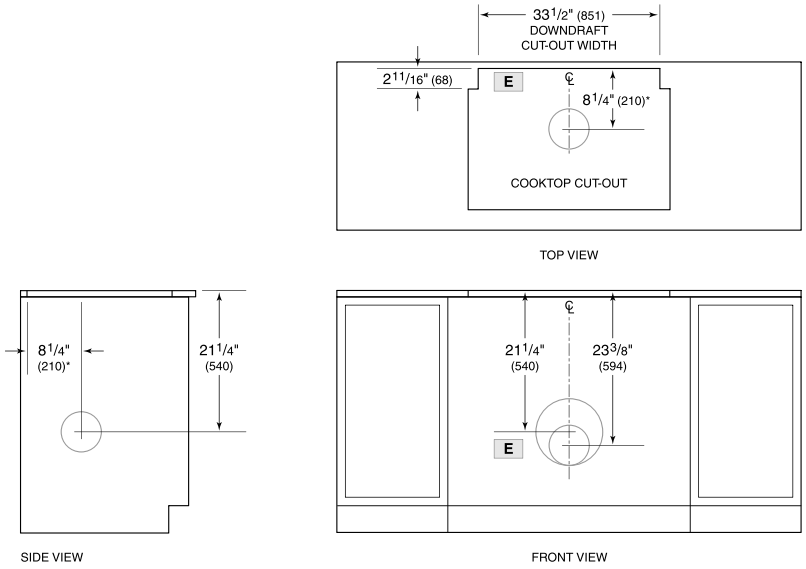

**6" (152) back from countertop cut-out when internal blower is rear mounted.*

NOTE: Internal blower 6" (152) round, side, rear or bottom discharge. In-line and remote blower 10" (254) round, rear discharge. Centerline indicates center of downdraft cut-out.

Specifications are subject to change without notice. This information was generated on January 30, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.