



RF 463 702

Fully integrated
with ice and water dispenser
Right-hinged
width 24"

RF 463 703

Fully integrated
with ice and water dispenser
Left-hinged
width 24"

Required installation accessories

RA 460 010

Heating kit if columns are not attached
(in separate niches) and less than
6" apart.

Installation accessories

RA 422 610

Stainless steel door panel with handle
for RF 463
Panel thickness ¾".

RA 450 010

Activated charcoal filter for water filter
system including saturation indication.

RA 425 110

Long stainless steel handle, length
44 ½", with three brackets, drilling
distance between each mount 21 13/16".

RA 460 020

Connecting element for vertically split
appliance fronts
(for a flush front).

RA 461 614

Ventilation grill
Stainless steel, for RF 463,
right-hinged.

RA 461 615

Ventilation grill
Stainless steel, for RF 463,
left-hinged.

RA 460 000

Installation kit for side-by-side
installation (for connecting any
two columns) Side-by-side kit comes
already attached to all RF freezers and
RW wine units

400 series freezer column

RF 463

- Stainless steel interior
- Integrated automatic ice maker with
fixed water connection
- Illuminated dispenser for ice
cubes, crushed ice and chilled
water
- Solid aluminum door bins
- Net volume 12 cu.ft.
- ENERGY STAR® certified
- Star-K certified

Operation

Electronic precision temperature
control with digital temperature
display.

Technical features

Dynamic cool air distribution with
Multi-Flow Air System.

Automatic defrosting with defrost
water evaporation.

Energy-saving vacation mode.

Open-door and malfunction
warning system.

Freezer compartment

No-frost technology with fast freezing.

Temperature adjustable from 7°F to
-9°F (-14°C to -25°C).

4 solid metal shelves, two of which are
manually adjustable.

2 fully extendable drawers with
transparent front, one of which is
large, one is regular.

Bright interior lighting with LED
sidewall pillars.

One gallon door bin.

1 door bin with transparent front flap.

Ice and water dispenser

Illuminated ice and water dispenser.

Integrated, with fixed water
connection.

Ice maker can be switched off
independently.

Ice cube production approx. 4.2 lbs.
(1.9 kg)/24 h.

Ice cubes and crushed ice.

Removable ice storage bin with

approx. 6.6 lbs. (3 kg) capacity.

Chilled water supply approximately
1.3 quarts.

Planning notes

Flat hinge.

Door opening angle of 115°, optional
90° door stop.

Max. door panel weight 50 lbs.

Requires custom toe-kick.

Shut-off valve for water connection
must be planned next to the appliance
and always be accessible.

If the water pressure exceeds 116 psi,
connect pressure relief valve between
water tap and hose set.

Cold water connection required.

Electrical location 6" above ground in
lower left corner of unit.

Water pressure 29 to 116 psi.

For details, please refer to the
refrigeration planning guide on pages
195–211.

Consumption data

Energy consumption 1.353 kWh/24 h.;
annually: 494 kWh.

Noise level 39 dBA.


Rating

Total rating 0.565 kW.

Total Amps: 15 A.

120 V / 60 Hz

Connecting cable 78 ¾" with plug.

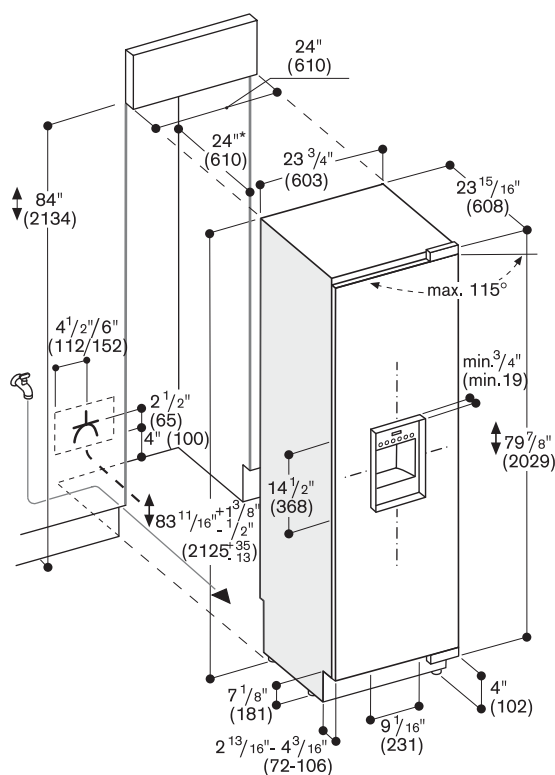

The door face dimensions are designed for a maximum gap of 1/8" (3 mm).

* For a flush-mounted appearance, the minimum cut-out depth must be 25".

See more details on pages 198 and 205.



Numbers indicated
inside parenthesis () = mm