

G 6665 SCVi AM

Fully-integrated, full-size dishwasher
with hidden control panel, 3D+ cutlery tray, custom panel and handle ready



- Energy Star Qualified
- Gentle cleaning of delicate glassware
- Perfect GlassCare
- Very easy door opening and closing –
ComfortClose
- Versatile and secure – ExtraComfort
basket design

EAN: 4002515716960 / material number: 10410120

Construction type	
Fully integrated dishwashers	•
24 inch dishwasher	•
Design	
Color	Stainless Steel.
Fascia panel version	Fully integrated fascia
Control type	Touch controls Programme selector button
Control panel	3-digit 7-segment display
Display color	White
Convenience	
Door closing aid	ComfortClose
Operating noise dB (A) re 1 pW	45
Countdown indicator	•
Delay start up to 24 hours	•
In-operation indication	optical and acoustic
Efficiency and sustainability	
Hot water connection	•
Half load	•
Gentle on dishware/glass	
AutoOpen drying	•
SensorDry	•
Active condensation drying	•
Perfect GlassCare	•
DetergentAgent	•
Dishwashing programs	
Normal	•
Pots & Pans	•
China & Crystal	•
QuickIntenseWash	•
SaniWash	•
Rinse & Hold	•
Rinse options	
Short	•
Basket design	
Cutlery loading	3D+ cutlery tray
FlexCare glass holder	2
Safety	
Waterproof system	•
Check filter saturation indicator	•

G 6665 SCVi AM


Fully-integrated, full-size dishwasher
with hidden control panel, 3D+ cutlery tray, custom panel and handle ready



Technical data	
Appliance width in in.(mm)	23 5/8 (598)
Appliance height in in.(mm)	33 3/4 (855)
Appliance depth in in.(mm)	22 1/2 (570)
Appliance depth with door open in in.(cm)	47 1/2 (120.5)
Net weight in lbs. (kg)	100 (45.0)
Total connected load in kW	1.5
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Length of water inlet hose in ft (m)	4 (1.50)
Length of water drain hose in ft (m)	4 (1.50)
Length of electrical wire in ft (m)	3 (1.20)

G 6665 SCVi AM

Fully-integrated, full-size dishwasher
with hidden control panel, 3D+ cutlery tray, custom panel and handle ready

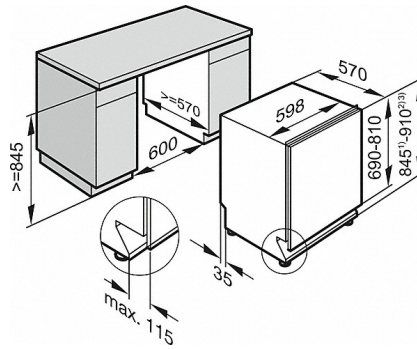

G2000/G2002 fully integrated dishwashers (installation drawing)

- 1) Plinth height 35-155 mm
- 2) Plinth height 100-220 mm
- 3) Appliance height max. 970 mm with plinth height conversion kit (Mat.-Nr. 6.394.760)