

Vellavi 24 and 36

700VLV24, 700VLV36 | 1.2

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

Dimmable with most ELV dimmers.

This instruction shows a typical installation.

Using the ring is optional.




CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

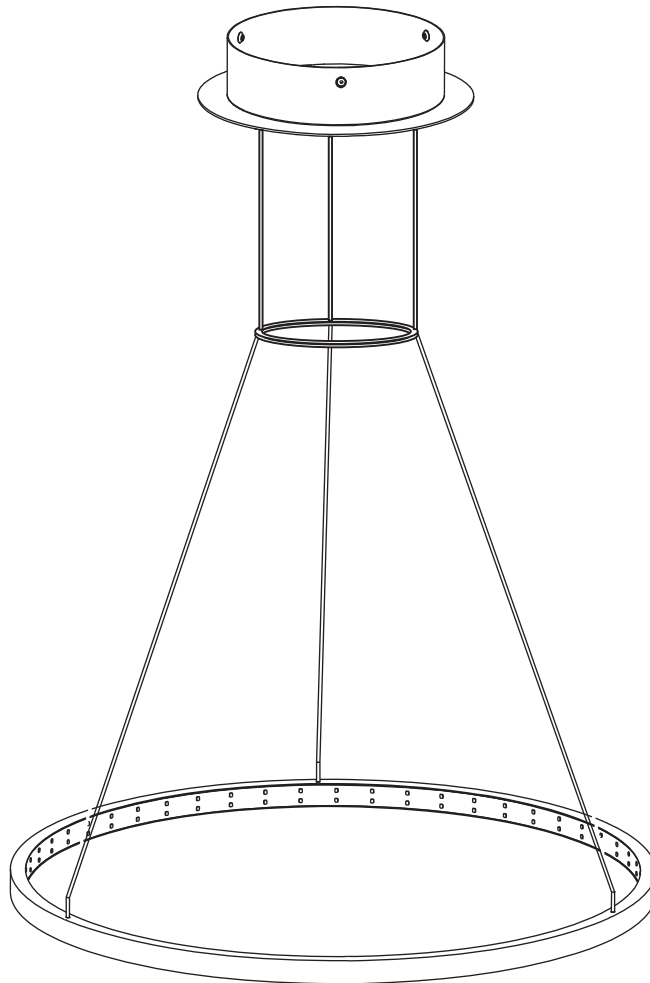

VISUAL COMFORT & Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

1A

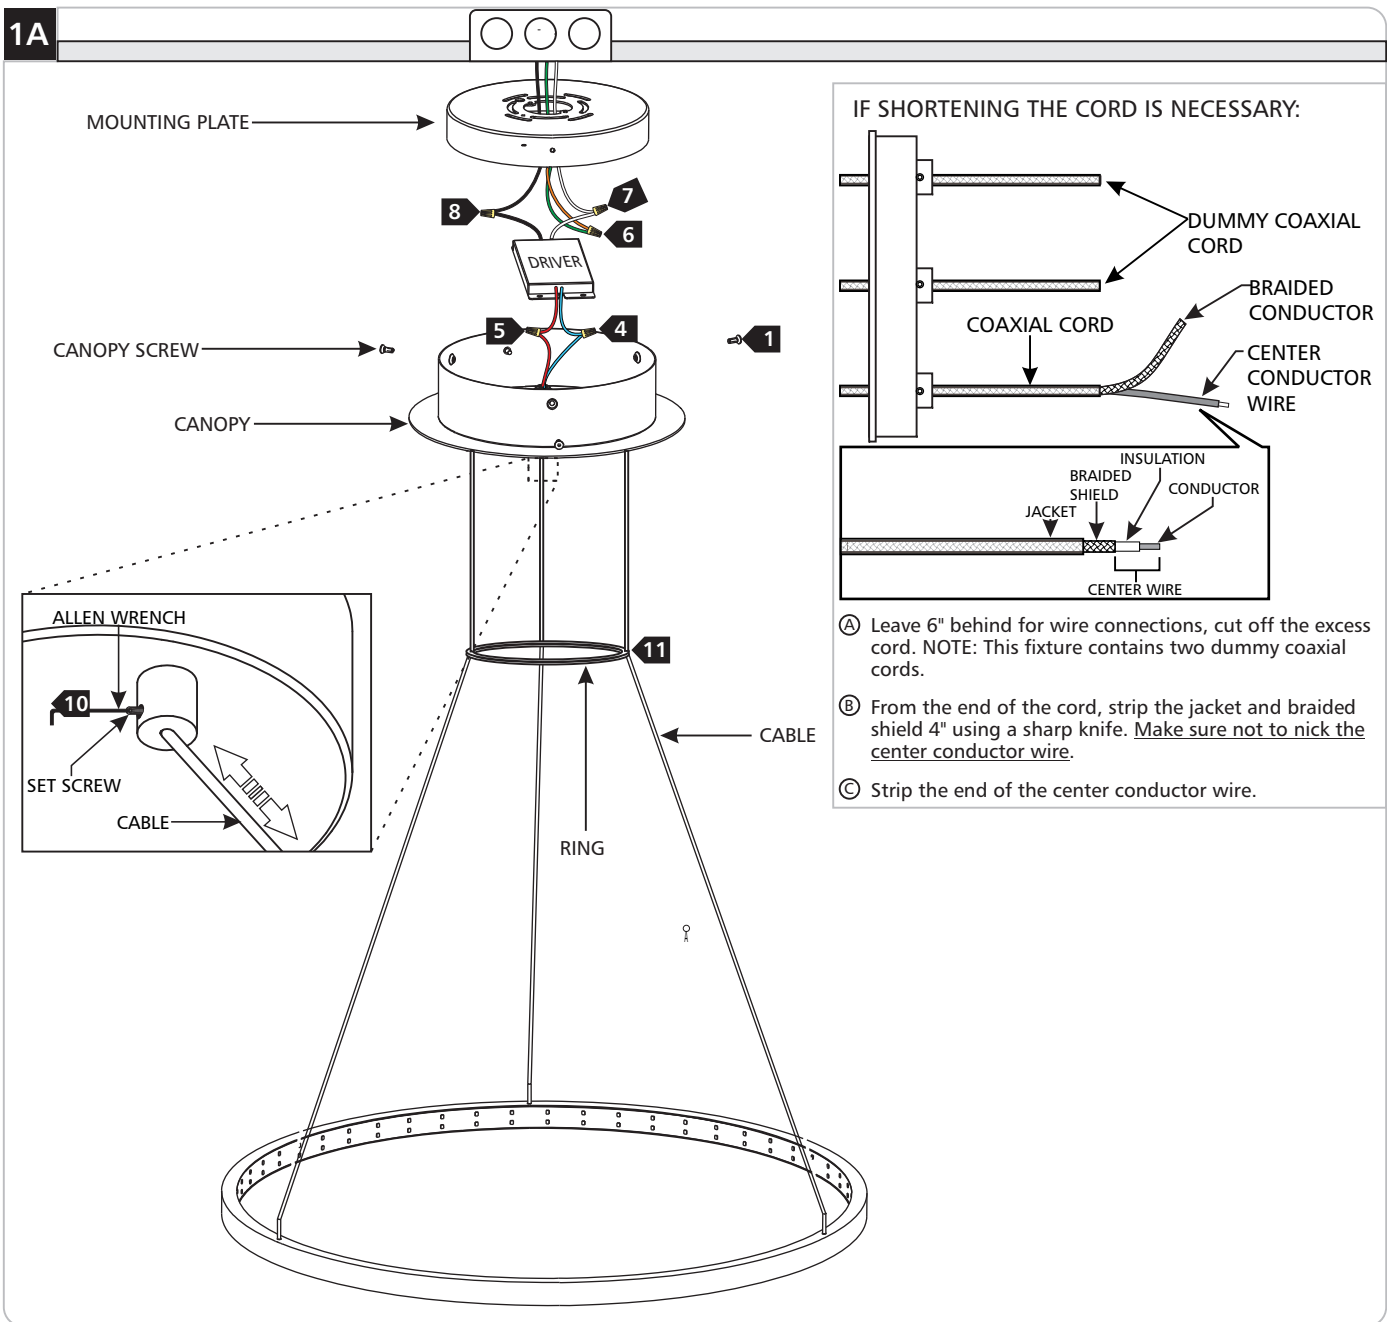

NOTE: using the ring is optional.

- 1 Remove all the Allen screws around the canopy using the provided Allen Wrench and remove the mounting plate.
- 2 Secure the mounting plate to the electrical box with the #8-32 screws.
- 3 Determine the desired height of the fixture, loosen the set screw on the strain relief and feed the cable into the strain relief until the desired height is achieved. Re-tighten the set screw on the strain relief to secure the cable in place. Repeat for the remaining cables. **NOTE:** If shortening the cables are necessary, ensure that the cable identifiers are not removed during installation (see illustration for directions).
- 4 Connect the blue driver wire to the blue fixture wire with a wire nut.
- 5 Connect the red driver wire to the red fixture wire with a wire nut.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the white driver wire(s) to the neutral power line wire with a wire nut.
- 8 Connect the black driver wire(s) to the hot power line wire with a wire nut.
- 9 Neatly place all cables, wires, and wire nut connections inside the canopy, align the canopy holes with the mounting plate holes, and secure the canopy in place by tightening the Allen screws using the provided Allen Wrench.
NOTE: If minor adjustments to the fixture's leveling is necessary, it is recommended that one person hold the fixture straight with the use of a level while the other adjusts the cables following the steps below.
- 10 **Fine Leveling (Optional):** Loosen (do not remove) the set screws on the necessary strain relief and gently pull or push the cable in very small increments through the strain relief to adjust the height of the fixture. Re-tighten the set screw on the strain relief using the provided Allen Wrench.
- 11 To adjust the ring (optional) to the desired look, loosen (do not remove) the set screws and slide the ring up or down, then re-tighten the set screws.