





BELTERRA CHANDELIERS

700BLT38; 700BLT38G; 700BLT43; 700BLT48

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

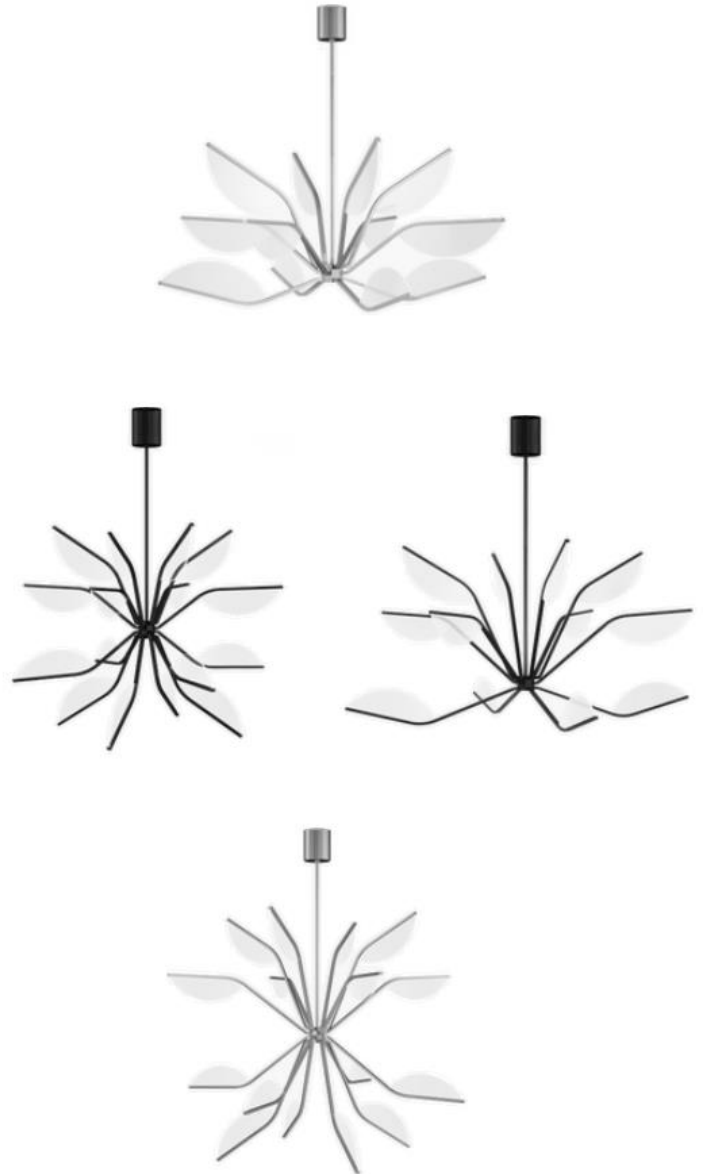

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Half Ball
- F. Drivers (2)
- G. Screw Collar
- H. Upper Stem Assembly
- I. Canopy
- J. Collar Nut
- K. Top Stem
- L. Lower Stem Assembly
- M. Fixture
- N. Fixture Arms

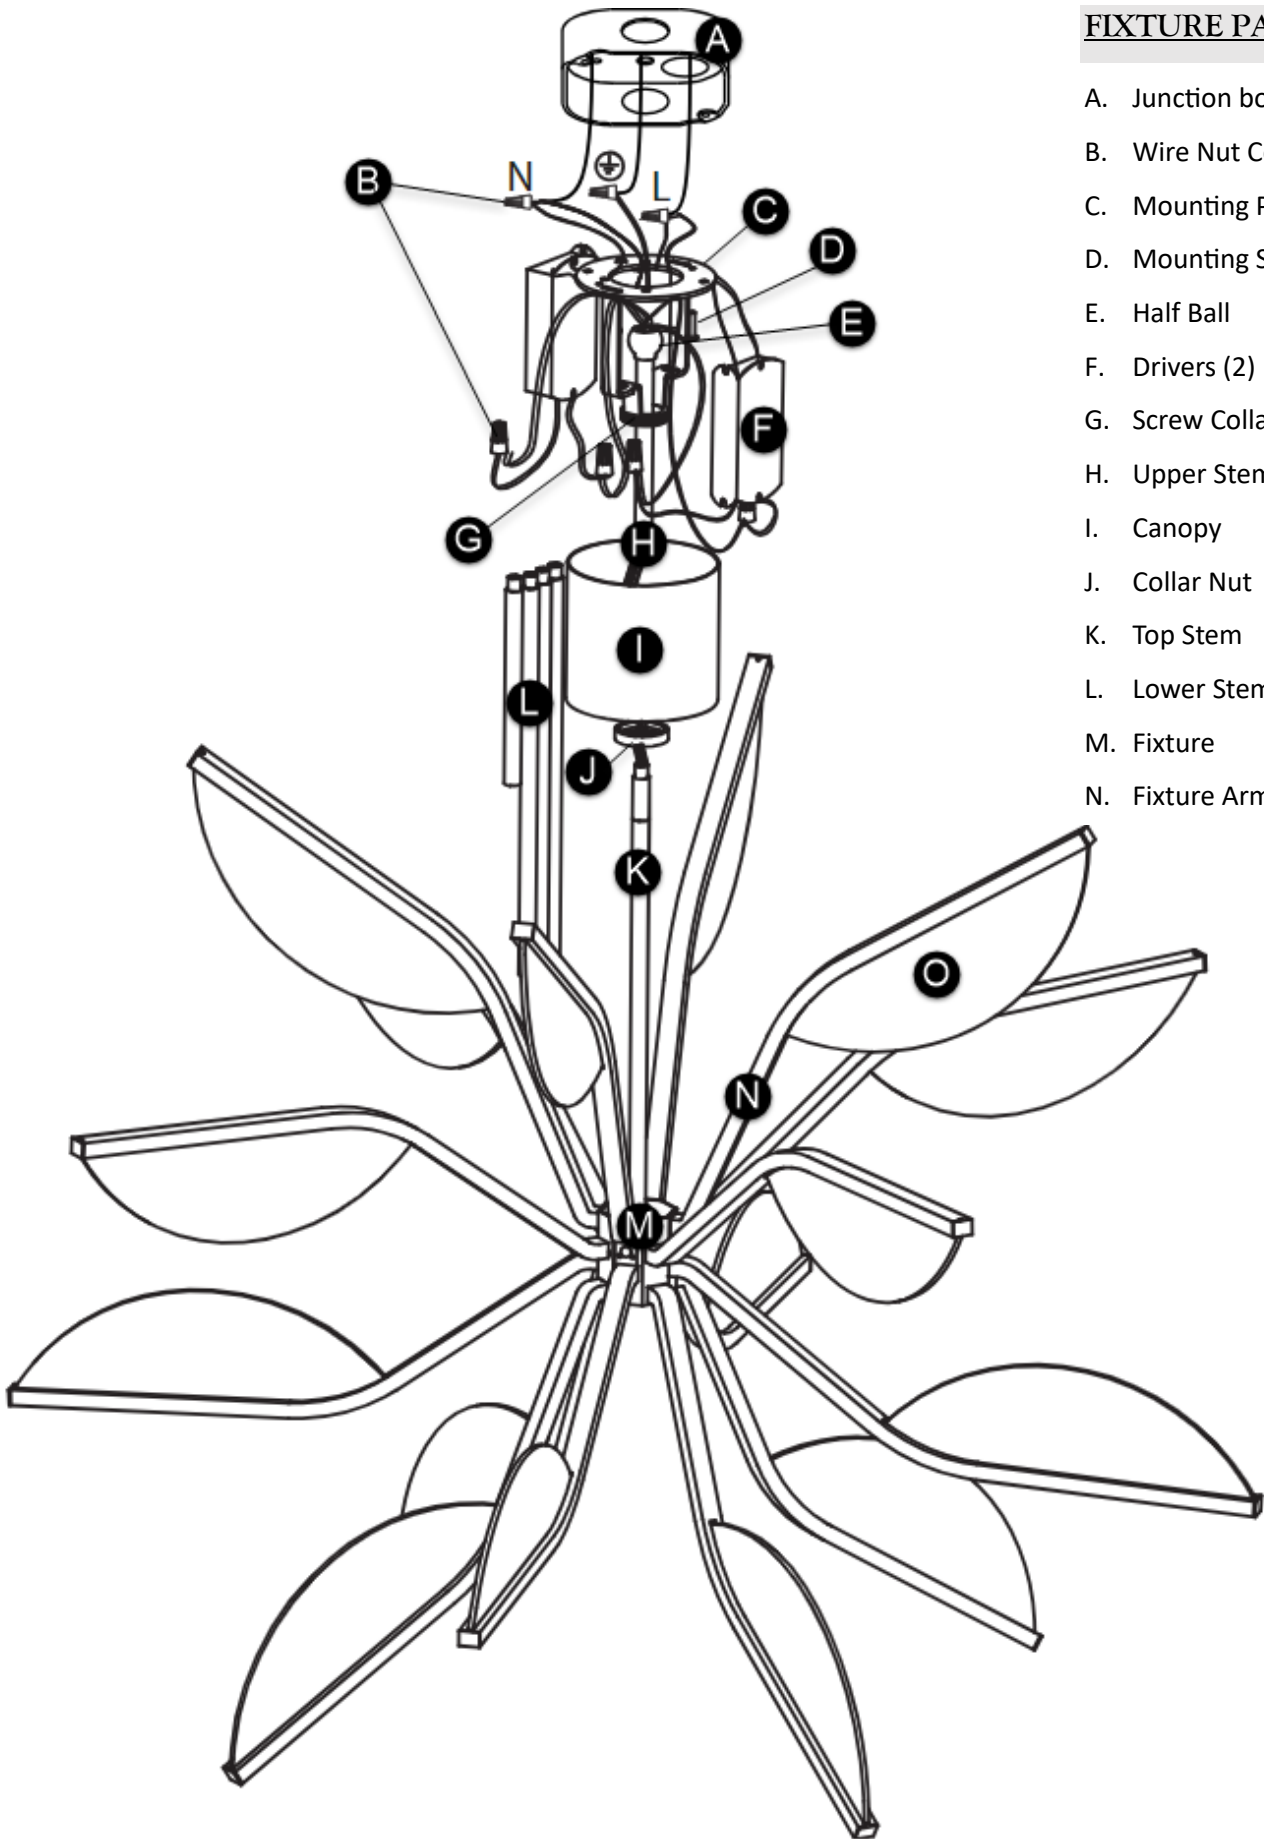

INSTRUCTIONS

I. Preparing the Fixture

1. Use the provided Allen wrench to remove the fixture screws to separate the mounting plate from the canopy.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Feed the half ball and upper stem assembly through the top of the canopy.
4. Determine the desired height of the fixture using the provided stem assemblies and assemble the fixture accordingly:
 - a) Feed the fixture wires through the collar nut and top stem.
 - b) For each section of the lower stem assembly used to add height, feed the wires through each stem, while screwing the sections together as each piece is added.
 - c) Once the desired height is reached, screw the entire lower stem assembly to the canopy.
 - d) Then feed the fixture wires through upper stem assembly and half ball sections.
 - e) Screw upper and lower stem assemblies together.
 - f) Seat the half ball into the screw collar, while ensuring that the metal finger is pointing outward.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) First Driver
 - i. Black driver wire and solid black fixture wire
 - ii. Blue driver wire and solid blue fixture wire
 - b) Second Driver
 - i. Black driver wire and striped black fixture wire
 - ii. Red driver wire and striped red fixture wire
 - c) White driver wires and neutral power line wire
 - d) Black driver wires and hot power line wire
5. 277V Only: For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
6. Carefully tuck the drivers (must be placed against the screw collar to ensure proper fit) and all the wires into the canopy.

III. Installing the Fixture

1. While supporting the fixture, lift and push the canopy into place against the mounting plate on the ceiling, so that the collar sticks out from the holes in the canopy.
2. Finish by screwing the collar nut onto the screw collar.