

Esther Swing Arm Wall

LW1081 | 1.0

GENERATION LIGHTING WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

SAVE THESE INSTRUCTIONS!

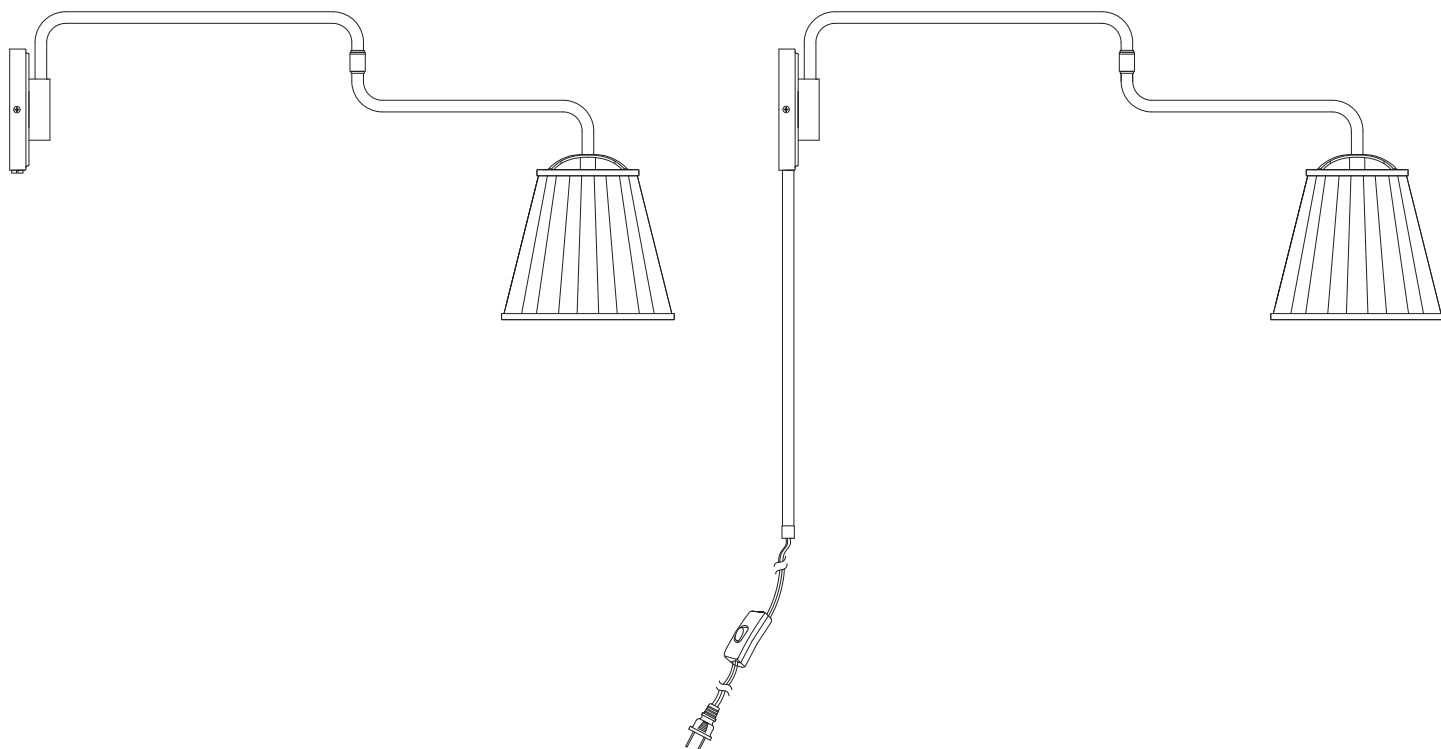


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.generationlighting.com

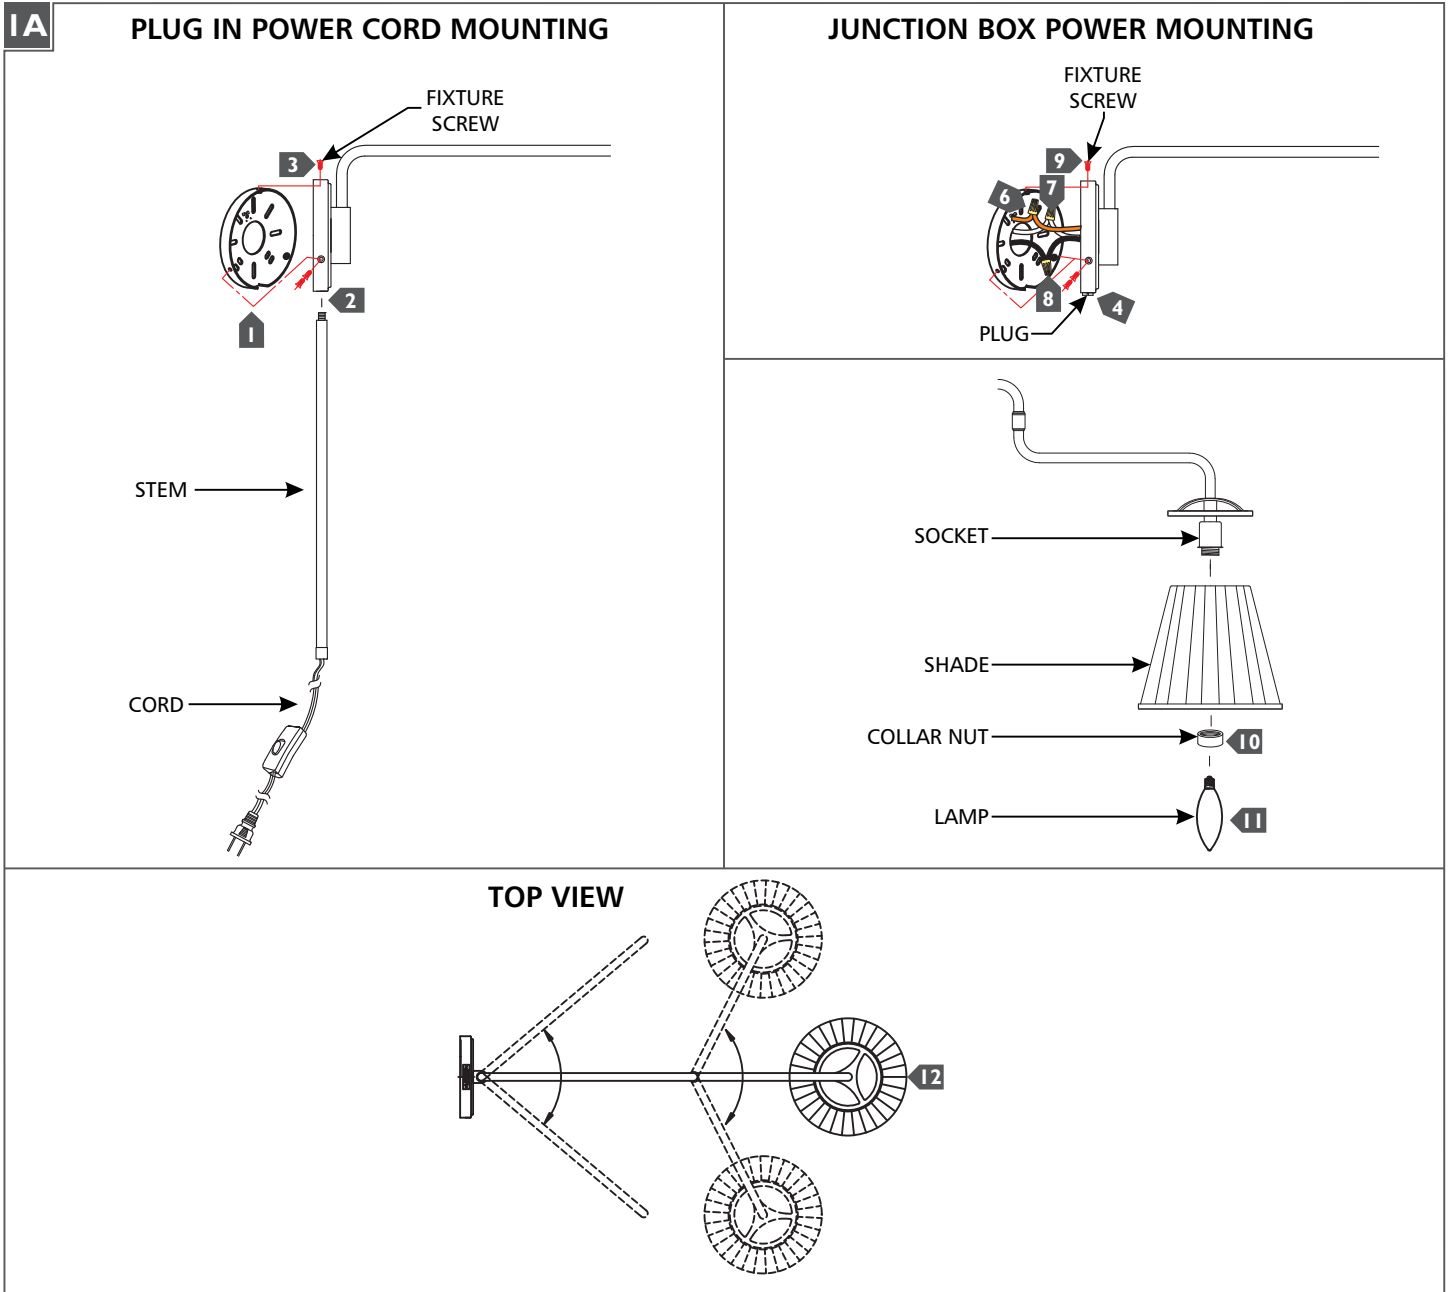

- 1 Plug in cord mounting:** (for junction box power mounting skip to step 4) properly secure the mounting plate to the wall or junction box.
- 2** Screw the stem onto the fixture base.
- 3** Secure the fixture to the mounting plate with the fixture screws. Skip to step 10
- 4 Junction box power mounting:** disconnect the cord wires from the fixture wires by removing the wire nuts, carefully pull the cord out of the fixture, then close the cord hole by screwing the provided plug.
- 5** Secure the mounting plate to the junction box.
- 6** Connect the fixture ground wire to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire to the hot power line wire with a wire nut.
- 9** Mount the fixture onto the mounting plate and secure it in place with the fixture screws.
- 10** Install the shade by placing it onto the socket and secure it in place by screwing the collar nut onto the socket.
- 11** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 12** Adjust the fixture arm to the desired position, see diagram for adjustability limitations .