

PD900DP

GE Profile™ Series 30" Drop-In Electric Range

Dimensions and Installation Information (in inches)

KW Rating	
240V	11.6
208V	8.7
Breaker Size	
240V	40 Amps
208V	40 Amps

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194° temperature rating.

Note: To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum of 6" spacing from adjacent side wall be allowed for possible extended, high-heat, element operation.

IMPORTANT: 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. IT DOES NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.

Optional Kits For Drop-In Electric Ranges (Available At Additional Cost)



Accessory Backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)
 JXS32SS (Stainless) - 4" High
 JXS32WW (White) - 4" High
 JXS32BB (Black) - 4" High

Rear Filler Strip

WB07T10680 - Black Filler Strip Assembly
 WB07T10681 - White Filler Strip Assembly
 WB07T10682 - Bisque Filler Strip Assembly

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

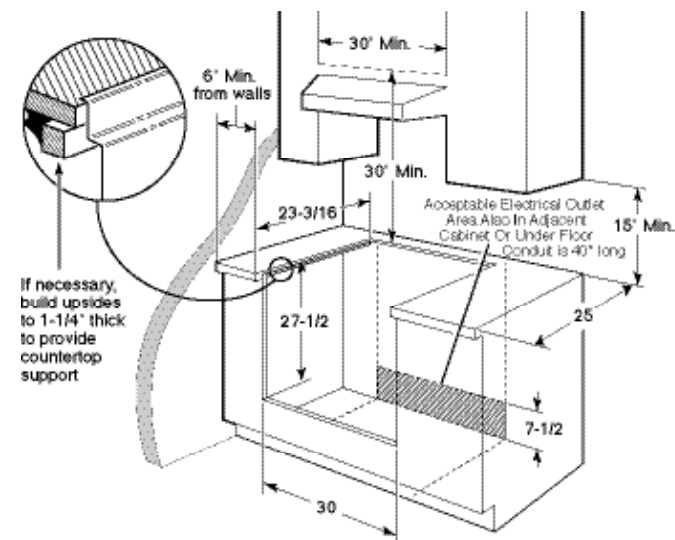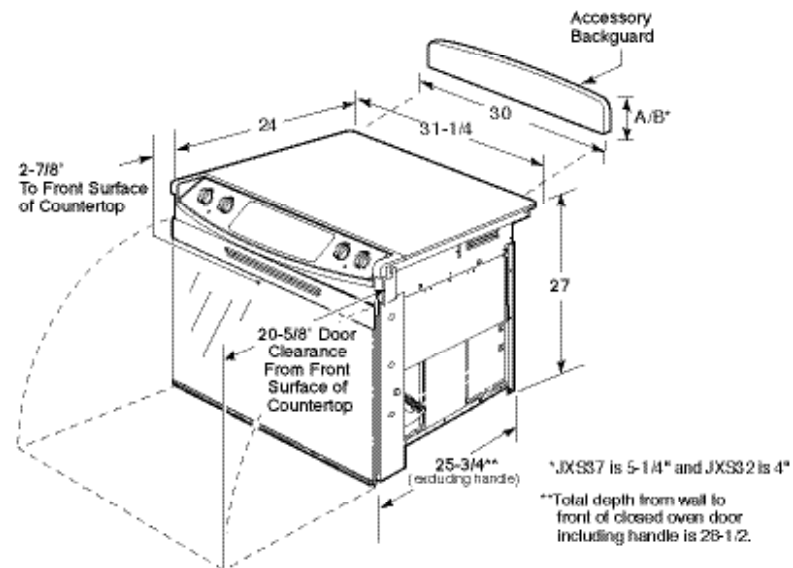

Above illustration intended for dimensional reference only.
 Refer to photograph for actual product appearance.



imagination at work

For answers to your Monogram® or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories



Specification Revised 4/13


220804

PD900DP

GE Profile™ Series 30" Drop-In Electric Range

Features and Benefits

- Ceramic glass cooktop - A smooth cooktop surface makes cleaning quick and easy
- Electronic oven controls - Electronic pads on the control panel are easy to operate with just a touch
- Dual element - Choose a ribbon heating element to accommodate the size of your pan
- 4.4 cu. ft. oven capacity - Enough room to cook an entire meal at once
- True Temp oven system - This feature helps ensure the temperature you set is the temperature you get, with less variance, to give you the baking and broiling performance you desire
- Ribbon heating elements - Powerful heat beneath the smooth surface provides high-speed warm-up and even heating
- Ceramic glass cooktop - A smooth cooktop surface makes cleaning quick and easy
- Six-pass bake element - One continuous heating element delivers even heating, unparalleled baking and evenly cooked food
- Warm mode - Helps keep just-cooked foods warm and at the ideal serving temperature
- Two oven racks - Includes two oven racks that are sturdy and reliable
- Proof Mode - Gently circulate 100°F air allows dough to rise quickly and efficiently
- Model PD900DPWW - White on white (white door and solid black cooktop)
- Model PD900DPCC - Bisque on bisque (bisque door and solid black cooktop)
- Model PD900DPBB - Black on black (black door and solid black cooktop)

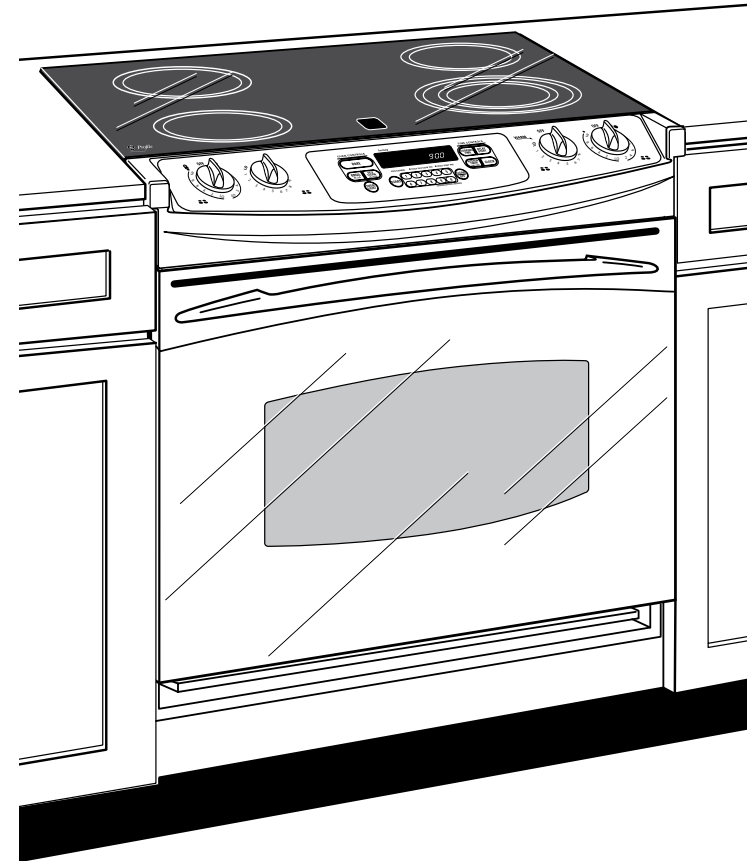

imagination at work