



Color Variants

BS470612
Stainless steel-backed full glass door
Width 24" (60 cm)

Optional accessories

BA010301
BA020360
Cooking container, stainless steel,
unperforated, 1 9/16" (40 mm) deep, 5
qt.
BA020370
Cooking container, stainless steel,
perforated, 1 9/16" (40 mm) deep, 5 qt.
BA020380
Cooking container, non-stick,
unperforated, 1 9/16" (40 mm) deep, 5
qt.
BA020390
Cooking container, non-stick,
perforated, 1 9/16" (40 mm) deep, 5 qt.
CLS10040
Cleaning cartridges, set of 4
GN010330
Adapter for gastronorm insert and
roaster. For use in Combi-steam ovens.
GN114130
Stainless steel cooking insert
GN114230
Stainless steel cooking insert
GN124130
Stainless steel cooking insert
GN124230
Stainless steel cooking insert
GN340230
Non-stick aluminum cast-iron roaster

Installation Accessories

GZ010011
Extension for inlet and outlet (78" long)

Product Variants

BS471612
400 series Combi-steam oven
Stainless steel-backed full glass door
Width 24" (60 cm)
left-hinged
Controls on top
BS474612
400 series Combi-steam oven
Stainless steel-backed full glass door
Width 24" (60 cm)
right-hinged
Controls at the bottom
BS475612
400 series Combi-steam oven
Stainless steel-backed full glass door
Width 24" (60 cm)
left-hinged
Controls at the bottom

BS470612
400 series Combi-steam oven
Stainless steel-backed full glass door
Width 24" (60 cm)
right-hinged
Controls on top

Handleless door / automatic door
opening
Fixed inlet and outlet water connection
Fully automatic cleaning system
Large cavity
2 LED light sources
External steam generation
Steaming without pressure
Convection 85°F to 450°F can be
combined with chosen humidity level of
0%, 30%, 60%, 80% or 100%
Sous-vide cooking with accurate
temperature regulation
Full surface grill behind glass ceramic,
combinable with circulated air up to
450 °F and steam
Automatic programs
Core temperature probe with
estimation of cooking time
TFT touch display
Panel-free appliance with surface
control module
Electronic temperature control from
85°F to 450°F
Net volume (50 litres)

Cooking modes

Convection + 100 % humidity.
Convection + 80 % humidity.
Convection + 60 % humidity.
Convection + 30 % humidity.
Convection + 0 % humidity. Low
temperature cooking. Sous-vide
cooking. Broil level 1 + humidity. Broil
level 2 + humidity. Broil + circulated
air. Dough proofing. Defrosting.
Regenerating.

Operation

One touch control panel and an
interactive visual display.
Rotary knob and TFT touch display
operation.
Clear text display in 44 languages.
Option to save 50 individual recipes
(incl. core temperature probe)
Personalization of automatic programs.
Information key with use indicators.
Side-opening door opens up to 180°
angle.

Features

2000 W broil element behind glass
ceramic.
Steam evacuation.
Misting.
Three-point core temperature prove
with automatic shut-off and estimation
of cooking time.
Automatic programs.
Actual temperature display.
Timer functions: cooking time, switch-
off time, short-term timer, stopwatch.
Automatic boiling point detection.
Capacity display for filter cartridge (if
connected to Gf 111 100 descaling
system).
Hygienic stainless steel cooking
interior.
3 tray levels.
Home network integration for digital
services (Home Connect) either via
cable connection LAN (recommended)
or wireless via WiFi.
The use of the Home Connect
functionality depends on the Home
Connect services, which are not
available in every country. For further
information please check: home-
connect.com.

Safety

Child lock.

Product Features

Cooking mode
, Broil and steam, Defrost,
fermentation, Hot Air, Hot air + steam
100%, Hot air + steam 30%, Hot air +
steam 60%, Hot air + steam 80%, Hot
air broiling, Regeneration
Time-setting Options
Included accessories
BA010301, BA020360, BA020370,
BA020380, BA020390, CLS10040,
GN010330, GN114130, GN114230,
GN124130, GN124230, GN340230

Consumption and connection features

UPC code
825225944201
Product color
Alternative colors available
Energy source
Electric
Watts (W)
Current (A)
16
Volts (V)
208/220-240
Frequency (Hz)
60

Approval certificates
CSA, ETL, UL

Power Cord Length
6 1/8

Plug type
no plug

**Overall appliance dimensions (HxWxD)
(in)**
17 15/16 " x 23 1/4 " x 21 1/4 "
18 1/16" x 22 1/16 " x 21 11/16 "

**Product packaging dimensions
(HxWxD) (in)**
22 5/8 x 26 x 27 3/16

107
Gross weight (lbs)
112.000

2020-09-03
Page 1

Safety shut-off.
Cooled housing with temperature
protection.

Cleaning


Fully automatic cleaning program.
Descaling program for the steam
generator.
Drying program.
Grease filter in front of convection fan,
dishwasher-safe.
Demo program for automatic cleaning.

Planning notes

Door hinge not reversible.
No other electrical appliances should
be installed above the BSP Combi-
steam oven.
At no point may the outlet hose be
positioned higher than the bottom edge
of the appliance. The outlet hose must
also be at least 100 mm lower than the
appliance outlet (see drawing "drainage
connection").
Inlet hose can be extended once.
The outlet hose must not be longer
than a maximum of 5 m.
The water connection (1) for the inlet
hose must always be accessible
and not located directly behind the
appliance.
The connection of the outlet hose to
the siphon (2) must not be directly
behind the appliance and should be
accessible.
The front of the appliance extends 1
7/8" from the cabinet front.
Consider the overhang when planning
to open drawers next to the appliance.
When planning a corner solution, pay
attention to the 90° door opening
angle.
Plan a power outlet outside of the cut-
out niche.
Rating
Total rating 3.1 KW.
Only cold water connection.
Total Amps: 16 A.
208 / 220 - 240 V / 60 Hz.
Connection cable 47 1/4" without plug.
Plan for a LAN cable.
Power consumption standby/display off
0.5 W.
Power consumption standby/network
1.8 W.
Time auto-standby/network 20 min.
Please check the user manual for how
to switch off the WiFi module.

GAGGENAU


Side view of BS 474/475 above BO

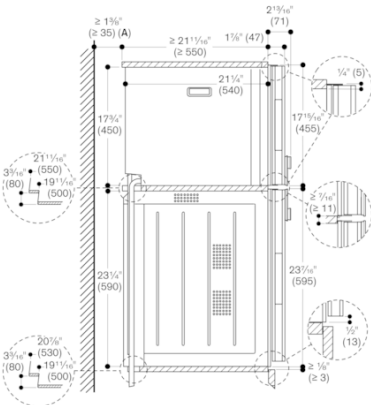

A: Only required if the water hoses for the BS steam oven cannot be accommodated in the corner recesses of the appliances.


Measurements in inches (mm)

View from rear

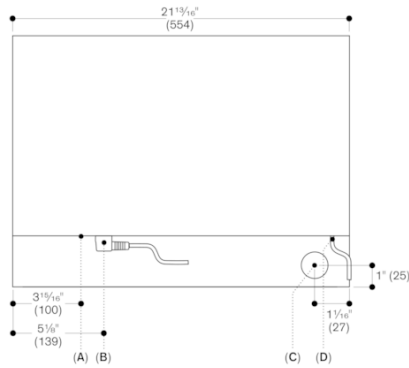


- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

Measurements in inches (mm)

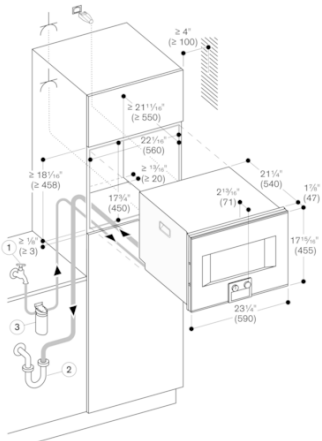

Socket

measurements in inches (mm)

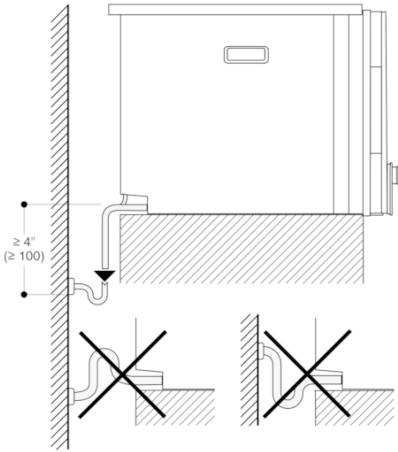

measurements in inches (mm)