



SIDE

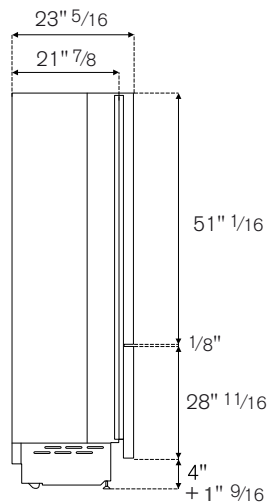


FRONT

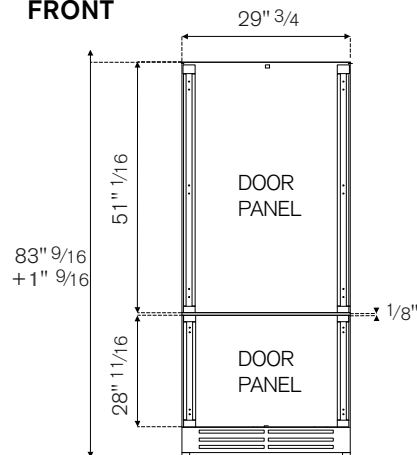


+1" $\frac{9}{16}$ for the adjustable max height of the leveling feet

TOP

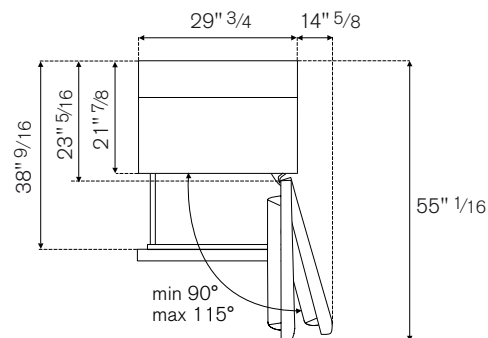


CUTOUT DIMENSIONS

SINGLE INSTALLATION

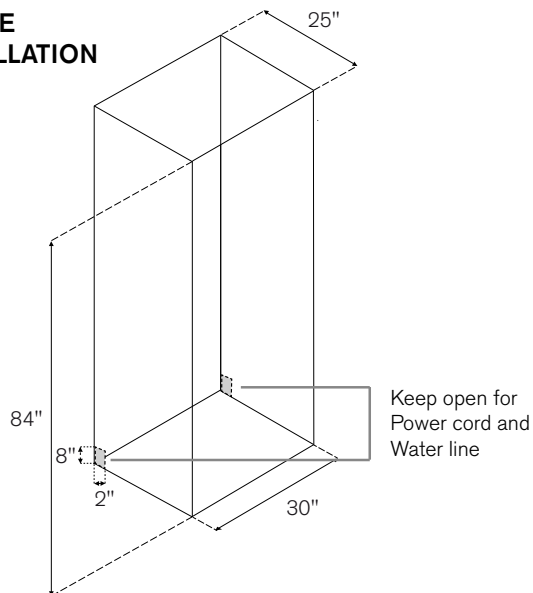

Keep open for
Power cord and
Water line

SIDE BY SIDE INSTALLATION


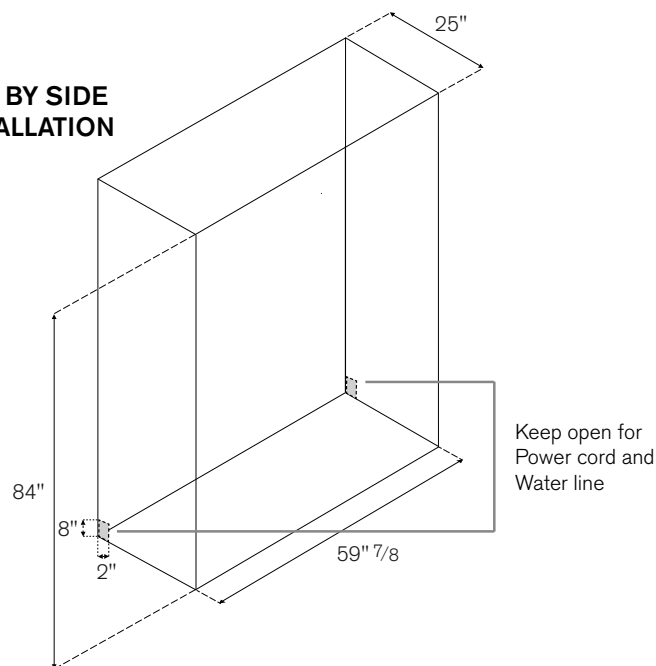


Keep open for
Power cord and
Water line

ELECTRICAL & WATER CONNECTION

A properly-grounded, electrical receptacle should be installed. A separate circuit breaker servicing only this appliance is recommended. Do not use a multi-purpose socket with other electrical appliances.

To connect to the water supply system, use a 1/4" waterline with accessible shut-off valve with a length of 60".

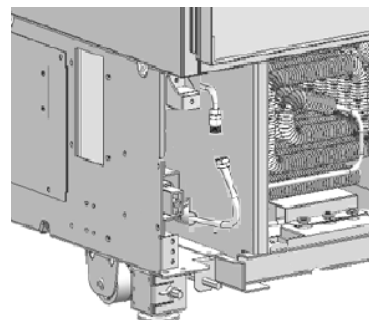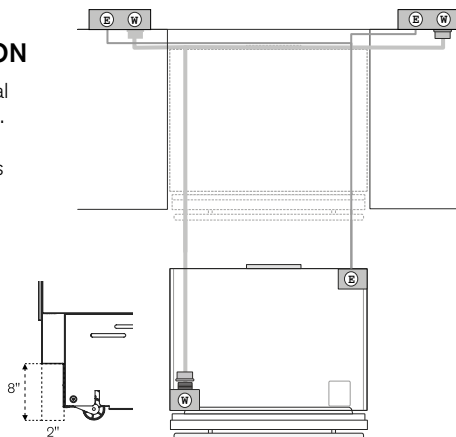

INSTALLATION REQUIREMENTS

If the appliance(s) is not connected through the side profile trims to secured cabinetry, anti-tip brackets must be installed.

The max weight for the cabinet panel is 35 lbs (16kg) for the refrigerator door and 20 lbs (9kg) for the freezer door. For a flush installation, cabinet panels should not be thicker than 15/16".