




Stainless Solid



Integrated Solid



Black Solid



White Solid



## Key Features

- **Industry Leading: BrightShield antimicrobial lighting creates a clean environment for ice** \*\*select models
- Daily ice production of up to 55 lb of ice
- Up to 25 lb in ice storage capacity
- Clear ice cube dimensions: 7/8" W x 7/8" H x 7/8" L
- Clear ice cube fullness can be adjusted
- Silent setting temporarily suspends ice making for 3 hours
- Digital Touch Pad Control
- Indicator alert notifies user when cleaning is needed
- Easy clean process only lasts 45 minutes
- White interior
- Bright white LED lighting (on non-BrightShield models)
- Clear heavy duty ice scoop included
- Drain required
- Factory installed drain pump model recommended if a gravity drain is not accessible
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Stainless steel handle (7/8" diameter)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs

## Model Details

| Model                                 | Voltage/Hz | Door Swing       | Pump          | Finish           | Shipping Weight |
|---------------------------------------|------------|------------------|---------------|------------------|-----------------|
| UHCL115-SS01A                         | 115 / 60   | Field Reversible | -             | Stainless Solid  | 95 lb           |
| UHCP115-SS01A                         | 115 / 60   | Field Reversible | Pump Included | Stainless Solid  | 101 lb          |
| UHCP115-SS81A **BrightShield Lighting | 115 / 60   | Field Reversible | Pump Included | Stainless Solid  | 101 lb          |
| UHCL115-IS01A                         | 115 / 60   | Field Reversible | -             | Integrated Solid | 92 lb           |
| UHCP115-IS01A                         | 115 / 60   | Field Reversible | Pump Included | Integrated Solid | 98 lb           |
| UHCP115-IS81A **BrightShield Lighting | 115 / 60   | Field Reversible | Pump Included | Integrated Solid | 98 lb           |
| UHCL115-BS01A                         | 115 / 60   | Field Reversible | -             | Black Solid      | 95 lb           |
| UHCP115-BS01A                         | 115 / 60   | Field Reversible | Pump Included | Black Solid      | 101 lb          |
| UHCL115-WS01A                         | 115 / 60   | Field Reversible | -             | White Solid      | 92 lb           |
| UHCP115-WS01A                         | 115 / 60   | Field Reversible | Pump Included | White Solid      | 101 lb          |


## Accessories

| Model          | Description                   | Finish | Shipping Weight |
|----------------|-------------------------------|--------|-----------------|
| 80-55667-00    | Clear Ice Machine Cleaner     | N/A    | 1 lb            |
| ULAWATERHOOKUP | Braided Water Supply Line Kit | N/A    | 2 lb            |


# HCL115 / HCP115 • 15" Clear Ice Machine

## Front


Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

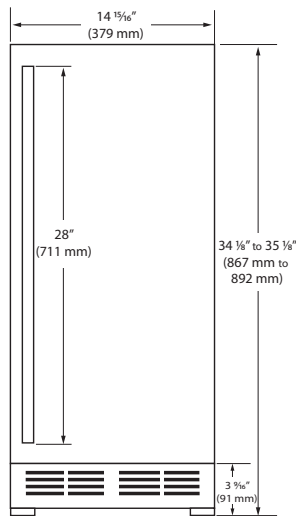


## Side

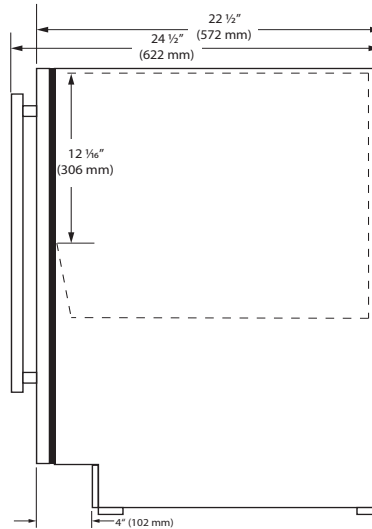

## Top

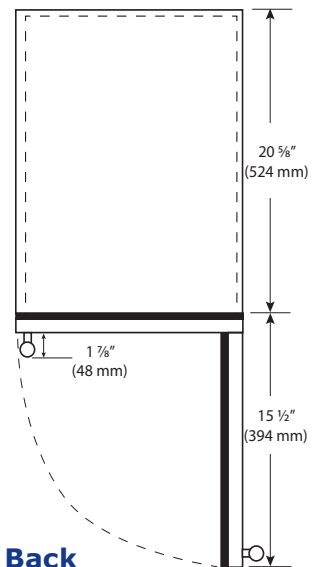


## Back

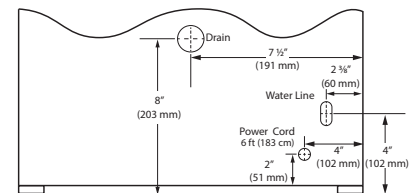

## Specifications

|                            |                                       |
|----------------------------|---------------------------------------|
| Model                      | HCL115/HCP115                         |
| Amps: Running              | 4                                     |
| Amps: Ice Harvest          | 5.5                                   |
| Control Type               | Digital Touch Pad                     |
| Defrost Type               | N/A                                   |
| Dimensions: Product Depth  | 22 1/2" / 572 mm                      |
| Dimensions: Product Height | 34 1/8" to 35 1/8" / 867 mm to 892 mm |
| Dimensions: Product Width  | 14 15/16" / 379 mm                    |
| ENERGY STAR                | N/A                                   |
| Ice Production Per Day     | 55 lb                                 |
| Ice Storage                | 25 lb                                 |
| Panel Height               | 30 1/4" / 768 mm                      |
| Panel Thickness            | 3/4" / 20 mm                          |
| Panel Type                 | Solid Panel                           |
| Panel Width                | 14 3/4" / 375 mm                      |
| Product Weight: Max        | 91 lb                                 |
| Refrigerant Type           | R600a (1.76 oz)                       |
| Sabbath (Star K Certified) | Yes                                   |

## Cabinet Cut-Out

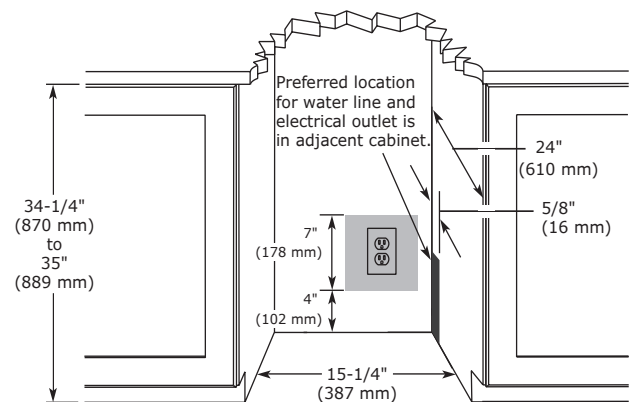

## Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**

See complete warranty for details



## Installation Notes

- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow



Please visit [u-line.com](http://u-line.com) to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • [sales@u-line.com](mailto:sales@u-line.com) • [u-line.com](http://u-line.com)