

DA 2360

Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



- Customized kitchen design - fully integrated in 23 (584)Inch width
- Space saving – suitable for narrow wall units from 11.8" deep
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean - Miele CleanCover

EAN: 4002515949887 / material number: 10765130


| Construction type | |
|--|---------------------|
| Insert ventilation hood | • |
| Design | |
| Color | No colour |
| RAL color possible as special order | • |
| Customization possible on request | • |
| Operating modes | |
| Recirculated mode | Convertible |
| OdorFree charcoal filter (order separately) | DKF19-900 |
| Control panel | |
| Electronic controls | • |
| Light-touch controls | • |
| Power levels (number excl. Intensive) | 3 |
| Intensive setting | • |
| Cleaning convenience | |
| Easy-to-clean CleanCover hood liner | • |
| Filter system | |
| Number of dishwasher-safe stainless steel grease filters | 1 |
| Lighting | |
| LED ClearView lighting | • |
| Light intensity in Lx | 350 |
| Color temperature in K | 3,000 |
| Blower | |
| Dual-action blower | • |
| AC motor | • |
| Air throughput with max. duct diameter in vented mode (not for external version) | |
| Air throughput | Values upon request |
| Safety | |
| Safety shut-off | • |
| Technical data | |
| Canopy width in in.(mm) | 23 (584) |
| Height of hood canopy in in.(mm) | 2 1/2 (63) |
| Depth of hood canopy in in.(mm) | 11 3/4 (297) |
| Minimum distance above electric cooktops in in.(mm) | 24 1/8 (610) |
| Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm | 26 (660) |
| Net weight in lbs. (kg) | 25 (11.0) |
| Length of electrical wire in ft (m) | 4 (1.5) |
| Standard plug fitted | • |
| Total connected load in kW | 0.36 |
| Voltage in V | 120 |
| Fuse rating in A | 15 |
| Number of phases | 1 |
| Installation notes | |
| Vent connection at top | • |
| Vent connection at top and rear | • |
| Diameter of vent connection in in.(mm) | 6 (150) |
| Standard accessories | |
| Non-return flap | • |
| Reducer from 150 to 125 mm Ø | • |

More information at www.MieleUSA.com

For further information please see next page...

DA 2360

Insert ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

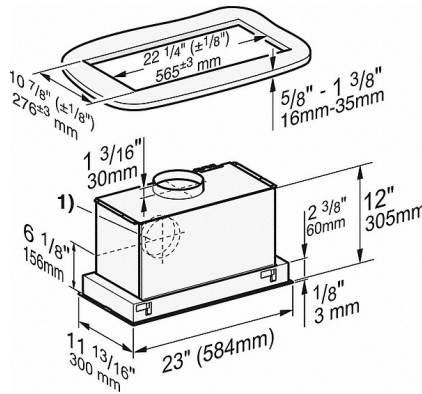

DA 2360 (Installation drawing) - USA

1) Vent connection alternatively to rear