

## UPCG3654ST

### 36-INCH GAS COOKTOP

**SIGNATURE**  
KITCHEN SUITE



#### RAPIDHEAT™ BURNER

This burner delivers 19,000 BTUs of power, allowing you to rapidly reach and maintain high temperatures for searing and stir-frying.

#### KNOB LIGHTING

Our knobs light up red when the burner is on so no simmer will go unnoticed.

#### GRIDDLE PLATE

The non-stick coated griddle accessory provides an extra-large cooking surface for meats, pancakes or other food usually prepared in a frying pan or skillet.

#### WIFI-ENABLED

Utilize the ThinQ® app for burner monitoring and push notifications, ensuring your cooktop is operating perfectly. You'll also be able to ensure everything is running smoothly with Smart Diagnosis.

#### Innovation

|                                                            |     |
|------------------------------------------------------------|-----|
| Wi-Fi Enabled for ThinQ® Control with iPhone / Android App | Yes |
| Remote Monitoring                                          | Yes |

#### Cooktop Features

|                                                  |                 |
|--------------------------------------------------|-----------------|
| Cooktop Surface                                  | Stainless Steel |
| Number of Burners / Elements                     | 5               |
| Sealed Gas Burners (Brass)                       | Yes             |
| Fuel Type                                        | LNG / LPG       |
| Continuous Grates                                | 3               |
| Dishwasher Safe Grates                           | Yes             |
| Cooktop Control Knobs with Red LED Back Lighting | Yes             |

#### Cooktop Performance

|                         |                 |
|-------------------------|-----------------|
| Burner Power BTU/h (NG) |                 |
| Left Rear               | 9,100 / 9,100   |
| Right Rear              | 5,000 / 5,000   |
| Center Rear (RapidHeat) | 19,000 / 15,000 |
| Left Front              | 9,100 / 9,100   |
| Right Front             | 12,000 / 9,500  |

#### Technical Specs

|                                  |              |
|----------------------------------|--------------|
| Energy Source Gas                | Natural Gas  |
| Alternative Energy Source LP Gas | LP Gas       |
| LP Conversion Kit Included       | Yes          |
| Required Power Supply            | 120VAC, 60Hz |

# UPCG3654ST

## 36-INCH GAS COOKTOP

**SIGNATURE**  
KITCHEN SUITE

### Dimensions and Weight

|                                 |                         |
|---------------------------------|-------------------------|
| Overall Width                   | 36"<br>(914.4 mm)       |
| Overall Height Including Grates | 4 1/8"<br>(104.8 mm)    |
| Overall Depth                   | 21 11/16"<br>(550.9 mm) |
| Net Weight (approx.)            | 58.31 lbs.              |
| Shipping Weight (approx.)       | 83.89 lbs.              |


### Accessories

|                      |               |
|----------------------|---------------|
| Included Accessories | Griddle Plate |
|----------------------|---------------|

### Warranty Summary\*

|                                 |         |
|---------------------------------|---------|
| Limited Warranty, Parts & Labor | 3 Years |
|---------------------------------|---------|

### COOKTOP AND CUTOUT DIMENSIONS

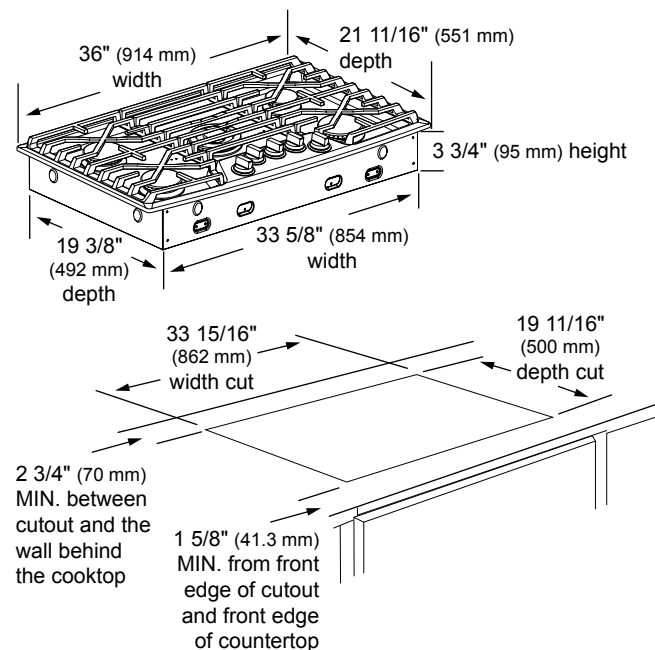

To ensure accuracy, it is best to make a template when cutting the opening in the counter

\*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

# UPCG3654ST


## 36-INCH GAS COOKTOP

**SIGNATURE**  
KITCHEN SUITE


### DIMENSIONS AND CLEARANCES

Provide enough clearances between the cooktop and adjacent combustible surfaces. These dimensions must be met for safe use of your cooktop. The location of the Electrical outlet and pipe opening may be adjusted to meet specific requirements. The cooktop may be placed with 2 3/4" clearance to the back wall.

### MAINTAIN THE FOLLOWING MINIMUM CLEARANCE DIMENSIONS

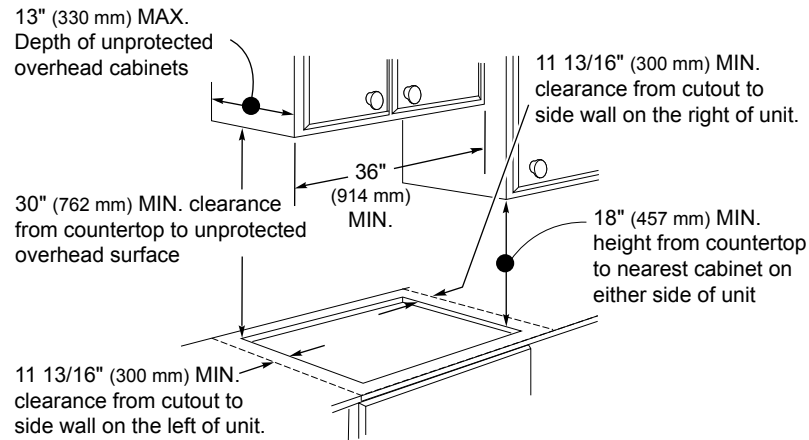

### CUTOUT DIMENSIONS – INSTALLED ABOVE SIGNATURE KITCHEN SUITE SINGLE WALL OVEN

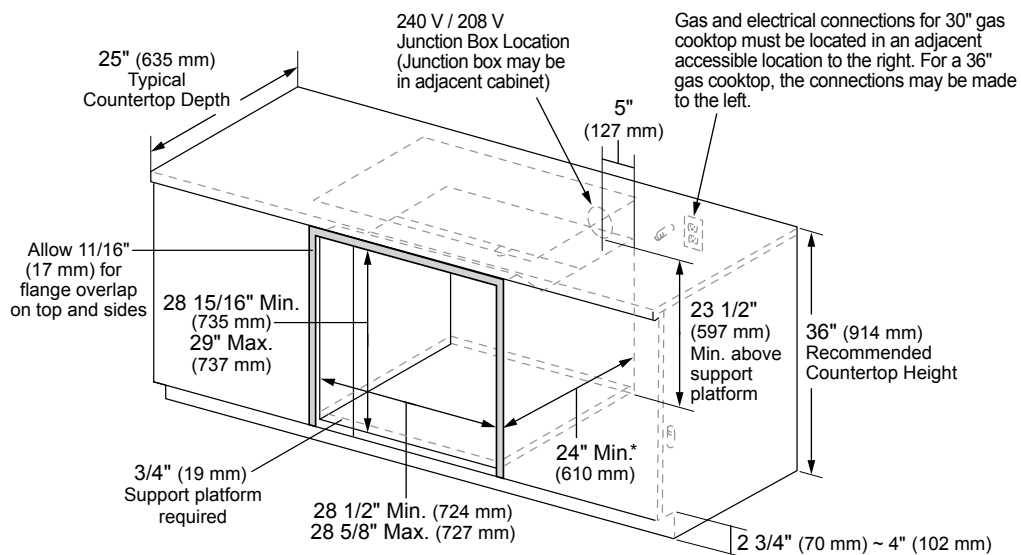

\*25" Min. (635 mm) cutout depth required for undercounter flush installation.  
Refer to installation art for flush installation in wall cabinet for required cutout dimensions.