

5.0 cu. ft. 27" WashCombo™ All-in-One Washer/Dryer

- 5.0 cu. ft. Mega Capacity
- Inverter HeatPump™ Technology
- TurboWash® 360° Technology
- AI Fabric Sensor / Smart Pairing™
- ezDispense® Automatic Dispenser
- 30 Cycles / 18 Options
- Allergiene™ Cycle
- ColdWash™ Option
- Direct Drive Motor (10-Year Limited Warranty)
- NeveRust™ Stainless Steel Tub
- LG ThinQ® Technology (Wi-Fi)



Washer+Dryer
WashCombo™
All-in-One

COLOR AVAILABILITY

WM6998HVA – Graphite Steel

WM6998HBA – Black Steel

CAPACITY & MATCHING DRYERS

Capacity (cu. ft.)	5.0
Matching Electric Dryer	N/A
Matching Gas Dryer	N/A

APPEARANCE

Electronic Controls with LCD Display	Yes
Hard Buttons	No
Touch Buttons	Yes
Dial-A-Cycle™	Yes

ENERGY & WATER

ENERGY STAR® Certified	Yes
CEE Qualified	Tier 2
Integrated Modified Energy Factor (IMEF)	2.92
Integrated Water Factor (IWF)	2.9

WASH CYCLES

Number of Cycles	30
Wash Cycles	Wash+Dry, AI Wash+Dry, Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Allergiene, Perm. Press, Dry Only, Delicates Dry, Perm. Press Dry, Tub Clean, Bright Whites, Sanitary, Rinse+Spin, Spin Only, Hand / Wool, Activewear, Swimwear, Kids Wear, Jeans, Dresses, Color Care, Sweat Stains, Small Load, Large Load, XL Load

WASH OPTIONS

Number of Options	18
Options	TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Extra Rinse, Control Lock, Drum Light, Cold Wash, Detergent Level, Softener Level, Signal, Cycle List Edit, Cycle Optimization, Softener Tank Use

WASH DETAILS

Internal Heater	Yes
Number of Wash / Rinse Temps	5
Wash / Rinse Temps	Extra Hot, Hot, Warm, Cold, Tap Cold
Number of Spin Speeds	5
Spin Speeds	Extra High, High, Medium, Low, No Spin
Max RPM	1300
Water Levels	Load Sensing
Number of Soil Levels	5
AAFA Certified	Yes

DRYING DETAILS

Ventless Condensing Drying	Yes
Automatic Dry Cycles	Normal, Damp, Energy Saver
Time Drying	30 min, 60 min, 90 min, 120 min
Normal Drying	Yes
Turbo Drying	No

FABRIC CARE

AI DD™	Yes (2.0)
Wash Technology	TurboWash™ 360°
Steam Technology	Yes
Allergiene™ Cycle	Yes
Sanitary Cycle	Yes
ColdWash™ Option	No
AI Fabric Sensor	Yes
Soil Level Sensor	Yes

CONVENIENCE

TrueBalance™ Anti-Vibration System	Yes
Dispenser Type	ezDispense® cartridge (Detergent, Softener), Main Wash, Bleach (cup)
Drum Light	Yes
End of Cycle Signal	Yes
LoadSense	Yes
Control Lock	Yes
Auto Suds Removal	Yes
Adjustable Leveling Legs	Yes
Auto Cleaning Condensor	Yes
ADA Compliant	No

SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ® Technology	Yes
ThinQ Care	Yes
ThinQ Up	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes (3.0)
Remote Start (On / Off)	Yes
Remote Monitoring & Notifications	Yes
Energy Monitoring	Yes
Tub Clean Coach	Yes

MOTOR AND AGITATOR

Motor Type	Inverter Direct Drive Motor
Axis	Horizontal

MATERIALS AND FINISHES

NeveRust™ Stainless Steel Drum	Yes
Cabinet / Control Panel	Painted Steel (One unit)
Top Plate	Painted Steel
Door / Rim	Glass / Chrome
Door Cover	Tempered Glass Door

TECHNICAL SPECS

Electrical Requirements	120V, 60 hz, 12 Amps
Type	Electric
Power Outlet Location	Within 60" of Either Side
Plug Type	3-Prong (Cord Attached to Unit)
Min. / Max. Water Pressure	20 - 120 psi

INCLUDED ACCESSORIES

Drain Hose, Non-Skid Pads, Hole Caps, Wrench, Tie Strap, Elbow Bracket (for Securing Drain Hose)

OPTIONAL ACCESSORIES

Pedestal	WDP6B, WDP6V
Pedestal (W x H x D)	27" x 13 5/8" x 28" (43 7/8" D with door open)

ADA-Compliant Pedestal Riser	WDPS2B
ADA-Compliant Pedestal Riser (W x H x D)	27" x 5 1/8" x 27 1/2"
LG Sidekick™ Pedestal Washer	WD300CB, WD300CV
LG Sidekick™ Pedestal Washer (W x H x D)	27" x 14 1/8" x 30 3/4" (50 1/2" with drawer open)
Stacking Kit	KSTK4

DIMENSIONS


Product (W x H x D)	27" x 39" x 33 1/8"
Depth with Door Open	57 3/4"
Cutout Dimensions (W x H x D)	29" x 51 1/4" x 37 3/8"
Carton Dimensions (W x H x D)	29 1/8" x 41 7/8" x 33 3/8"
Approx. Weight (Product / Carton)	246.9 / 260.1 lbs

LIMITED WARRANTY

Parts and Labor	1 Year
Direct Drive Motor	10 Years (Parts Only)
Drum	3 Years (Parts Only)

DIMENSIONS / CLEARANCES**FLOOR INSTALLATION**

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least 1 inch (2.5 cm) at the sides and 4 inches (10 cm) behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

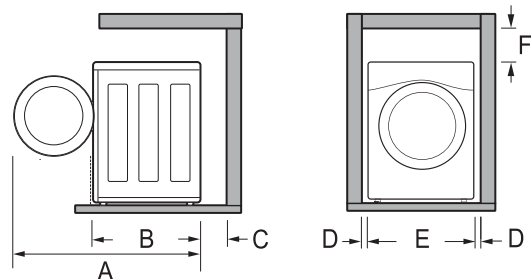**DIMENSIONS / CLEARANCES**


A	57 3/4" (146.6 cm)
B	33 1/8" (84 cm)
C	4" (10 cm)
D	1" (2.5 cm)
E	27" (70 cm)
F	12 1/4" (31 cm)

STACKING OR PEDESTAL INSTALLATION

The washer can be stacked on top of a pedestal or pedestal washer.

DIMENSIONS / CLEARANCES

A	33 1/8" (84 cm)
B	4" (10 cm)



ASTHMA & ALLERGY FRIENDLY Mark is a Registered Trade Mark of the ASTHMA AND ALLERGY FOUNDATION OF AMERICA and ALLERGY STANDARDS LTD.