
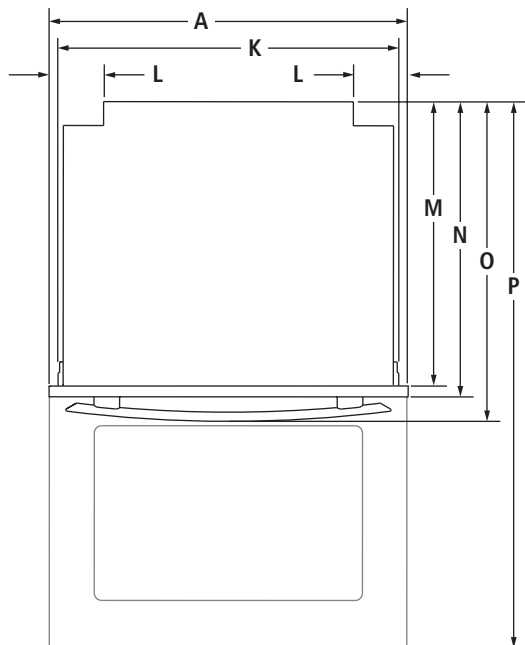


30" COMBINATION MICROWAVE/WALL OVENS

JMW3430W, JMW2430W, JMW2330W – 29³/₄" x 43¹/₈" x 26³/₄"

PRODUCT DIMENSIONS

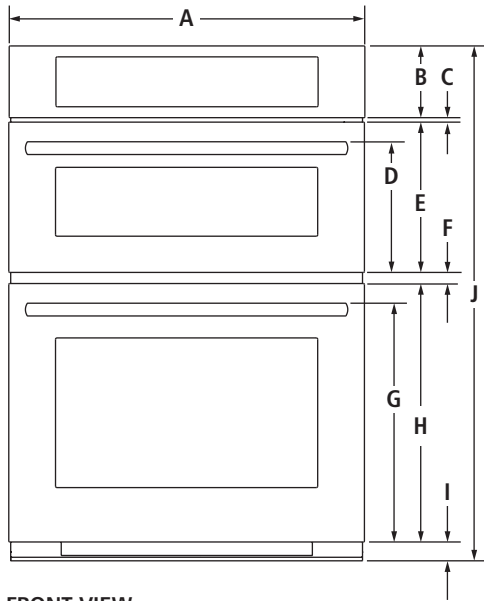


MODEL #		JMW3430W JMW2430W JMW2330W	
		in	cm
A	Overall width		
	Pro-Style® Stainless, Euro-Style Stainless or Oiled Bronze	29 ³ / ₄	75.6
	Floating Glass	29 ⁵ / ₈	75.3
B	Height of control panel	6	15.2
C	Space between control panel and door	³ / ₈	0.9
D	Height to top of microwave oven handle		
	Pro-Style® Stainless	11 ¹ / ₄	28.7
	Euro-Style (color-coordinating)	11	28.0
E	Height of microwave oven door	12 ⁵ / ₈	31.9
F	Space between doors	1	2.4
G	Height to top of oven handle		
	Pro-Style® Stainless	20 ¹ / ₄	51.4
	Euro-Style (color-coordinating)	20	50.7
H	Height of oven door	21 ⁵ / ₈	54.9
I	Height of trim	1 ¹ / ₂	4.0
J	Overall height	43 ¹ / ₈	109.4
K	Width of recessed oven	28 ¹ / ₄	71.8
L	Width of conduit channel	3 ⁵ / ₈	9.3
M	Depth of recessed oven	23 ⁷ / ₈	60.5
N	Depth with doors	24 ³ / ₄	62.8
O	Depth with handles		
	Pro-Style® Stainless	27 ¹ / ₄	69.2
	Euro-Style (color-coordinating)	26 ³ / ₄	68.0
P	Depth with door fully open	45 ³ / ₈	115.2

30" COMBINATION MICROWAVE/WALL OVENS

JMW3430W, JMW2430W, JMW2330W – 29³/₄" x 43¹/₈" x 26³/₄"

DIMENSIONS AS INSTALLED

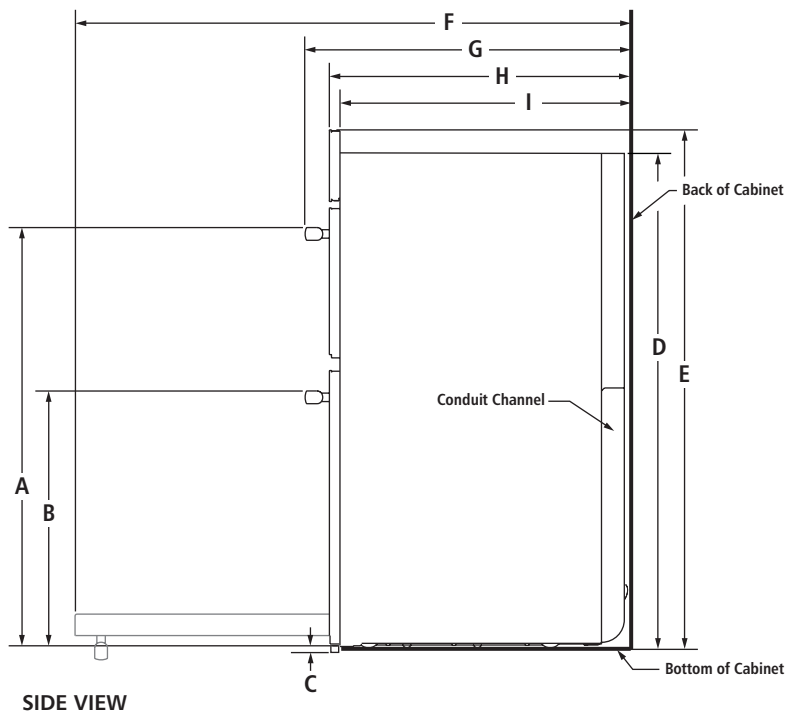


MODEL #		JMW3430W JMW2430W JMW2330W	
		in	cm
A	Height to top of upper handle Pro-Style® Stainless	35 ¹ / ₈	89.4
	Euro-Style (color-coordinating)	34 ⁷ / ₈	88.7
B	Height to top of lower handle Pro-Style® Stainless	21 ¹ / ₂	55.1
	Euro-Style (color-coordinating)	21 ³ / ₈	54.4
C	Height of trim extending below cutout	¹ / ₄	0.6
D	Height of recessed oven	41	104.2
E	Height to top of control panel	43	109.1
F	Depth with door fully open	45 ³ / ₈	115.2
G	Depth with handles Pro-Style® Stainless	27 ¹ / ₄	69.2
	Euro-Style (color-coordinating)	26 ³ / ₄	68.0
H	Depth with doors	24 ³ / ₄	62.8
I	Depth of recessed oven	23 ⁷ / ₈	60.5

30" COMBINATION MICROWAVE/WALL OVENS


JMW3430W, JMW2430W, JMW2330W – 29¾" x 43⅛" x 26¾"

OPENING/CLEARANCE DIMENSIONS

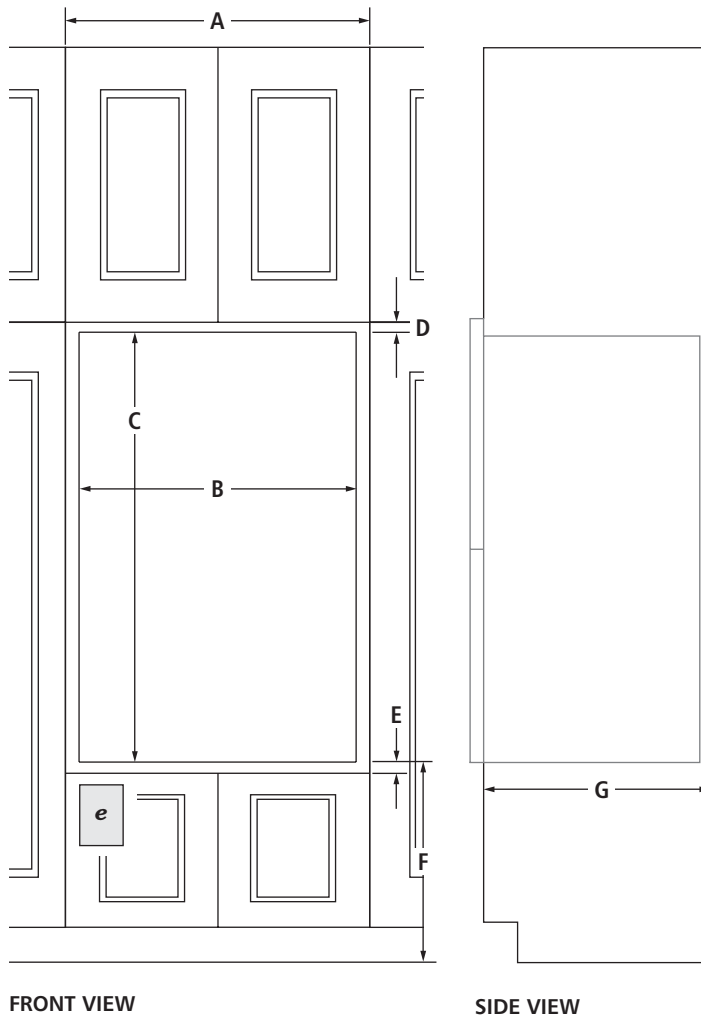

FRONT VIEW

SIDE VIEW

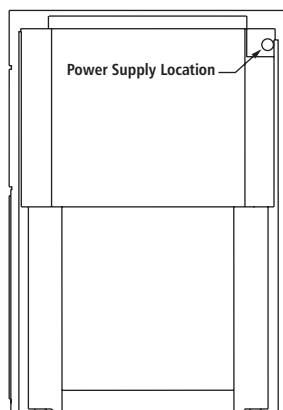

BACK VIEW

MODEL #		JMW3430W JMW2430W JMW2330W	
		in	cm
A	Width of cabinet (min.)	30	76.2
B	Width of cutout	28½	72.4
C	Height of cutout	41¼	104.8
D	Top of cutout to bottom of upper cabinet door (min.)	2	5.1
E	Bottom of cutout to top of lower cabinet door (min.)	1½	3.8
F	Bottom of cutout to floor	4⅝-19¼	11.7-48.9
G	Depth of cutout (min.)	24	61.0
e	Recommended junction box location		

ELECTRICAL REQUIREMENTS


240 volt, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended.

The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located 3" (7.6 cm) maximum below the support surface. Drill a 1¼" (3.4 cm) minimum diameter hole in the left rear corner of the support surface for access to the junction box.

30" COMBINATION MICROWAVE/WALL OVENS – FLUSH INSTALLATION

JMW3430W, JMW2430W, JMW2330W – 29³/₄" x 43¹/₈" x 24³/₄" (depth without handles)

OPENING/CLEARANCE DIMENSIONS

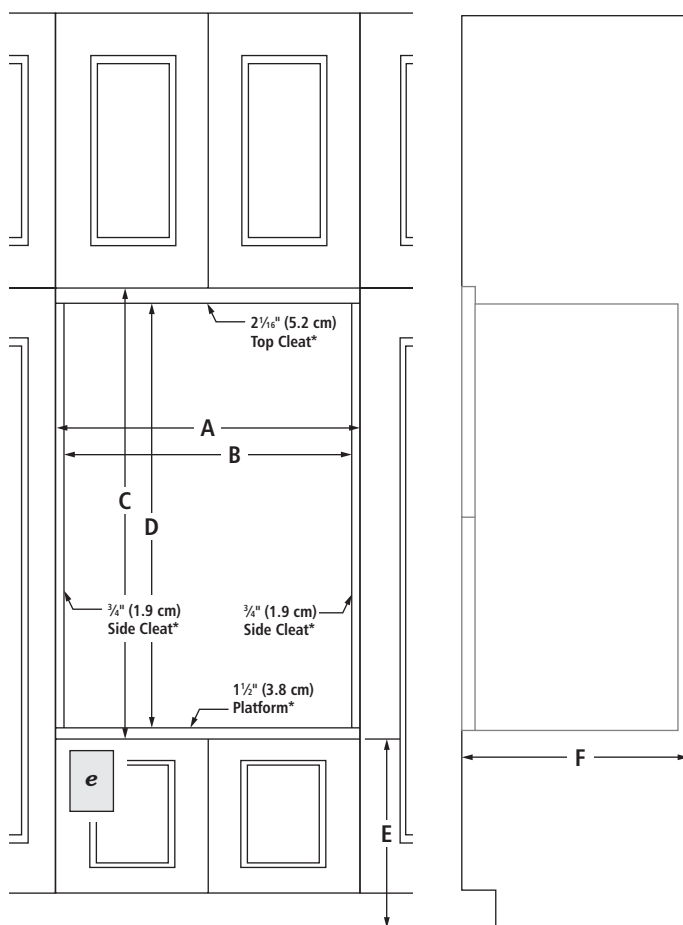

FRONT VIEW

SIDE VIEW

MODEL

		JMW3430W JMW2430W JMW2330W	
		in	cm
A	Width of flush inset cutout (min.)	30	76.2
B	Width of opening (min.)	28 ¹ / ₂	72.4
C	Height of flush inset cutout (min.)	44 ¹³ / ₁₆	113.8
D	Height of opening (min.)	41 ¹ / ₄	104.8
E	Bottom of cutout to floor	4 ⁵ / ₈ - 19 ¹ / ₄	11.7- 48.9
F	Depth of cutout (min.)	25	63.5
e	Recommended junction box location		

ELECTRICAL REQUIREMENTS

240 volt, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended.


The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located 3" (7.6 cm) maximum below the support surface. Drill a 1¹/₄" (3.4 cm) minimum diameter hole in the left rear corner of the support surface for access to the junction box.

FLUSH INSTALLATION REQUIREMENTS

A 25" (63.5 cm) minimum cutout depth is required.

These dimensions will result in a 3³/₈" (1.0 cm) reveal on the top, a 1¹/₈" (0.3 cm) reveal on the sides and a 1³/₈" (3.5 cm) reveal on the bottom of the wall oven.

The front face of the cleats and platform will be visible and should be treated as a finished surface.

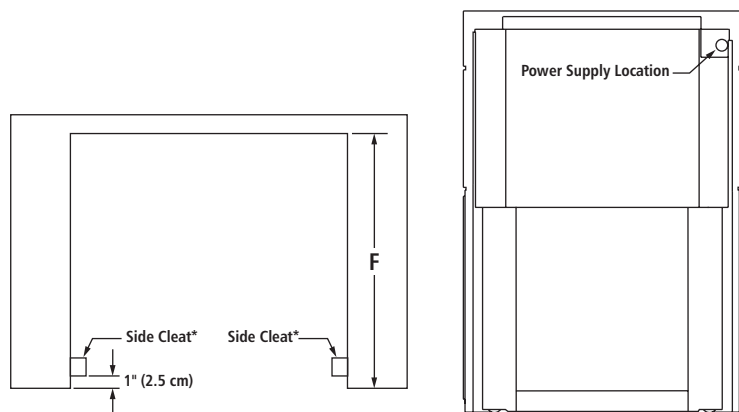

TOP VIEW

BACK VIEW

*Cleats and platform must be recessed 1" (2.5 cm) from the front of the cabinet.